
Rev	AWO #	Description	Date	Appr
-		RELEASED	6/10/19	

APPROVED: _____

DATE: _____ TITLE: _____

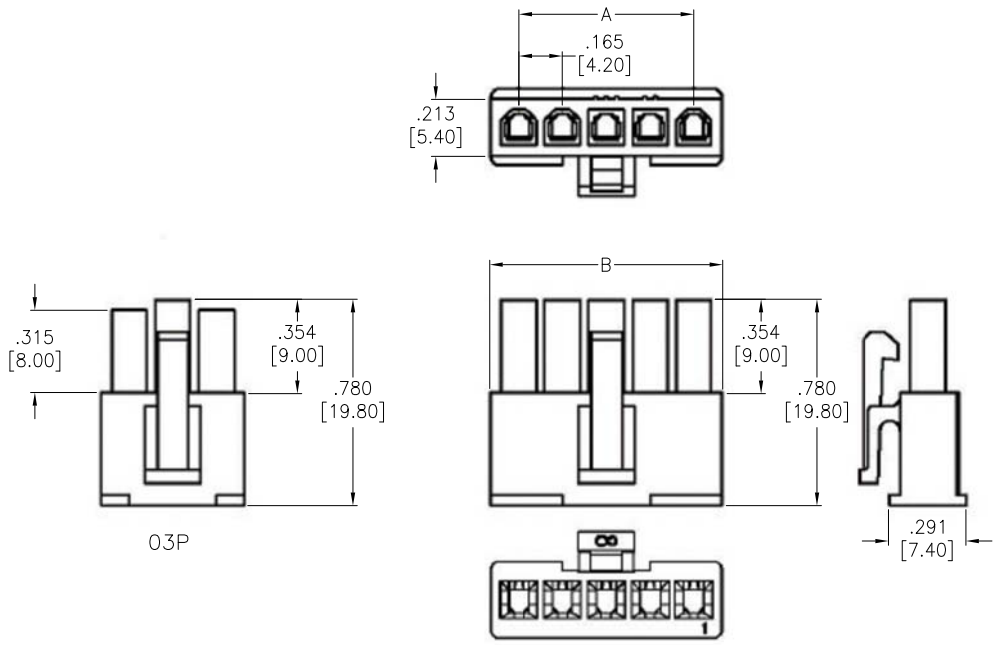

Wire Size AWG	Circuits 2, 3	Circuits 4 ~ 6
# 16	9 A	8 A
# 18	9 A	8 A
# 20	7 A	6 A
# 22	5 A	4 A
# 24	4 A	3 A
# 26	3 A	2 A
# 28	2 A	1 A

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-2, Glow wire compliant
Insulator color: White
Electrical:
Voltage rating: 600V (R.M.S.)
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
-40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 02 thru 06
A= .165 [4.20] x No. of Space
B= .165 [4.20] x No. of Positions + .047 [1.20]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	OW	6/10/19
CHECKED	TW	6/10/19
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .165 [4.20] PITCH FEMALE WIRE HOUSING, SINGLE ROW, GLOW WIRE

SIZE	PART NO.	REV.
X	DMH-XX-S3-GW	-

REF: S00123T | SCALE: NTS | SHEET 1 OF 1