

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	3/14/11	

APPROVED: _____

DATE: _____ TITLE: _____

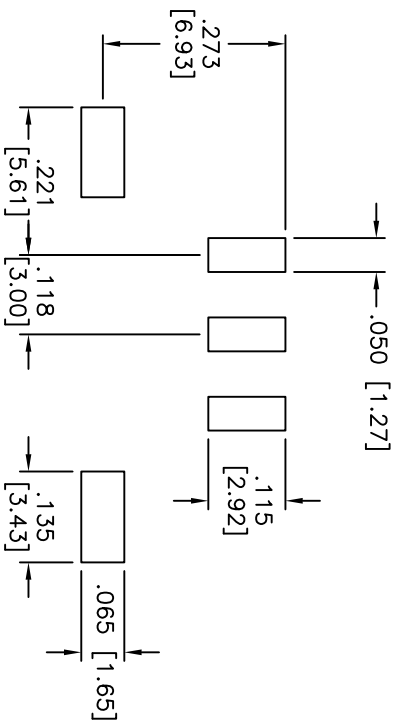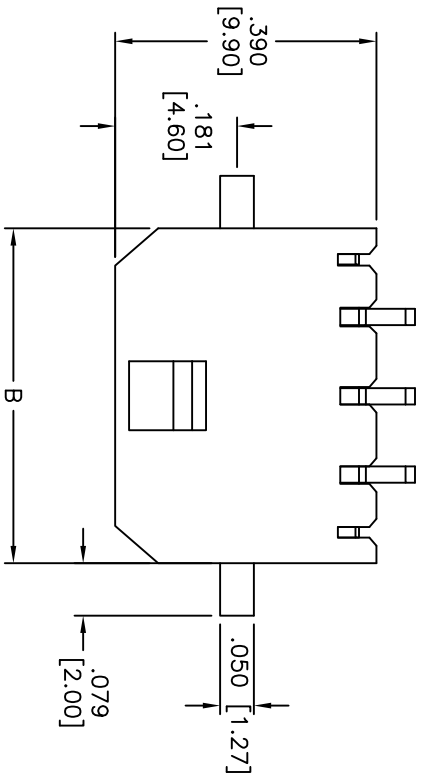

RECOMMENDED PCB LAYOUT

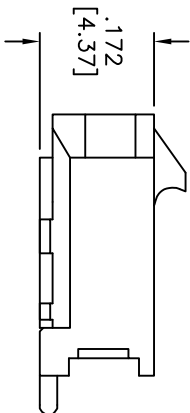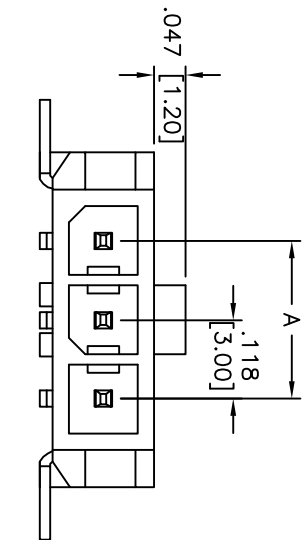

POSITIONS	Dimension	
	A	B
2	.118 [3.00]	.380 [9.65]
3	.236 [6.00]	.498 [12.65]
4	.354 [9.00]	.616 [15.65]
5	.472 [12.00]	.734 [18.65]
6	.591 [15.00]	.852 [21.65]
7	.709 [18.00]	.970 [24.65]
8	.827 [21.00]	1.089 [27.65]
9	.945 [24.00]	1.207 [30.65]
10	1.063 [27.00]	1.325 [33.65]
11	1.181 [30.00]	1.443 [36.65]
12	1.299 [33.00]	1.561 [39.65]

SPECIFICATIONS:

Material:

Insulator: Nylon 6T, rated UL 94V-0

Insulator color: Black

Contact: Brass, Tin plated

Electrical:

Operating voltage: 250 VAC

Current rating: 5 Amps

Contact resistance: 10 mohms max.

Withstanding voltage: 1500 VAC for 1 minute

Temperature Rating:

Ambient temperature range: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .118 [3.00] SINGLE ROW HEADER

HORIZONTAL, TIN PLATED, SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
X	± .10	Ø X	± .10	X	± .020	Ø XX	± .015
.XXX	± .015	Ø XXX	± .010	.XXX	± .015	Ø XXX	± .010
APPROVALS				DATE			
DRAWN	AY		3/14/11	CHECKED	VW		3/14/11
APPROVED							
SIZE				PART NO.			
X				DML-1-XX-A-H-T-A-TSMT			
REF: S00123T				SCALE: NTS			
2				SHEET 1 OF 1			