

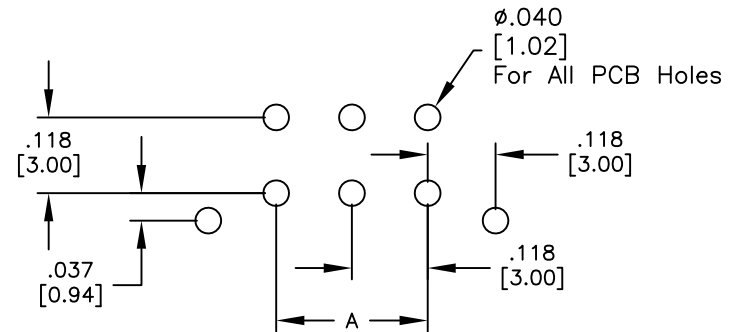
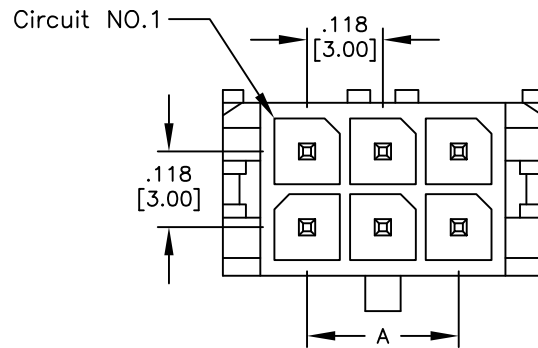


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/17/15	
A		UPDATED SHAPE	3/20/15	HR/CH

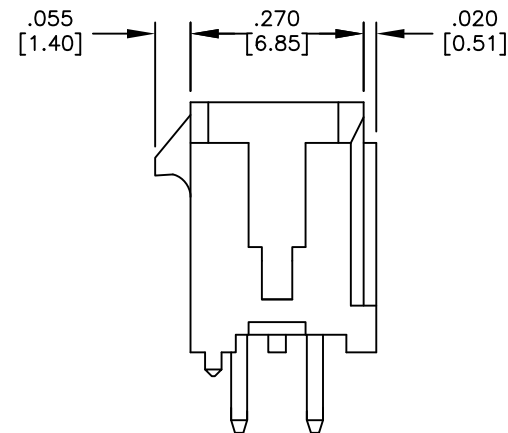

RECOMMENDED PCB LAYOUT

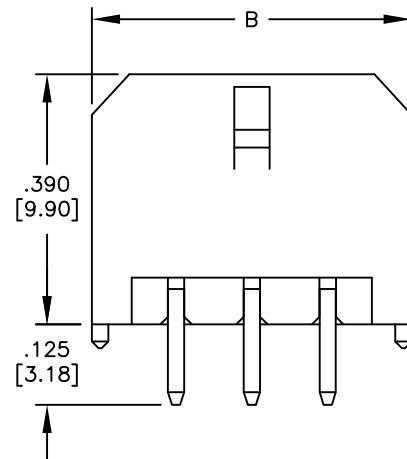

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Tin over Copper underplate overall
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 20 & 22 Awg: 5 Amps max
 24 Awg: 4 Amps max
 26 Awg: 3 Amps max
 28 Awg: 2 Amps max
 30 Awg: 1 Amp max
 Contact resistance: 10 mohms max
 Dielectric strength: 1500 VAC for 1 minute
 Environmental:
 Lead free, RoHS compliant.



Positions: 2 thru 24

A = .118 [3.00] x No. of Spaces

B = .118 [3.00] x No. of Spaces + .262 [6.65]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
APPROVALS DRAWN HR 3/17/15 CHECKED CH 3/17/15 APPROVED				TITLE .118" [3.0MM] MICRO FIT HEADER, TIN PLATED, DUAL ROW VERTICAL, NO KINK PIN		
SIZE X PART NO. DML-XX-A-V-T-A-NK REF: S00123T SCALE: NTS SHEET 1 OF 1				REV. A		