
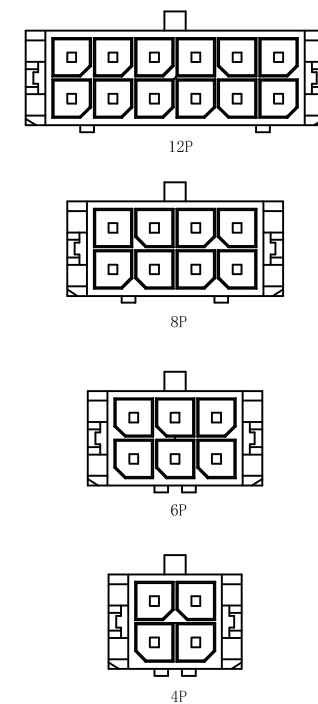
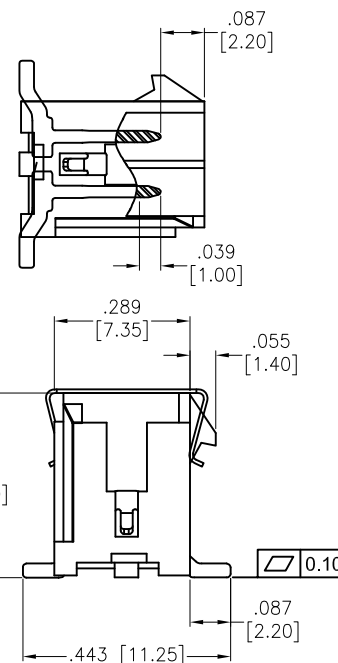


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/13/20	

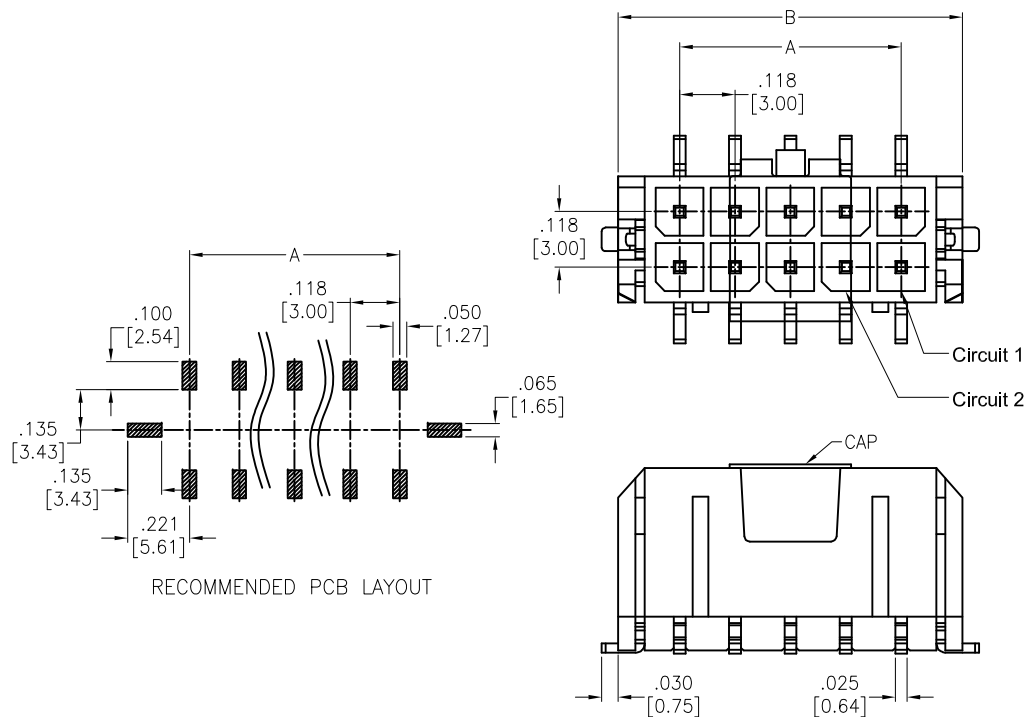

SPECIFICATIONS:

Material:

Insulator: (LCP) Hi-Temp Thermoplastic, rated UL94V-0

Insulator color: Black

Contacts: Brass, Tin plated

Electrical:

Current rating: 5 Amp

Contact resistance: 10 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500 VAC

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

Positions: 02 thru 24

A = .118 [3.00] x No. of Spaces

B = .118 [3.00] x No. of Spaces + .262 [6.65]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	AY	3/13/20
CHECKED	RL	3/13/20
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.118 [3.00] DUAL ROW HEADER, VERTICAL
TIN PLATED, SMT, W/CAP

SIZE X	PART NO. DML-XX-A6-V-T-TSMT-PP-T/R	REV. -
REF: S00168C	SCALE: NTS	SHEET 1 OF 1