

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/17/15	


APPROVED: _____


DATE: _____ TITLE: _____

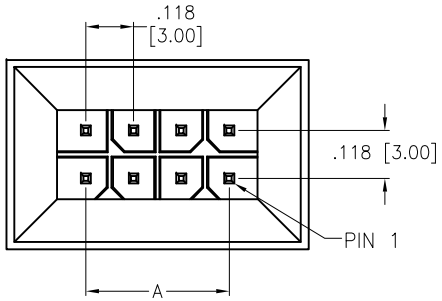

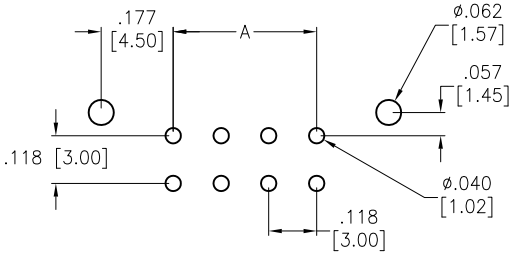

RECOMMENDED PCB LAYOUT





SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Operating voltage: 250V AC/DC
Current rating: 5A AC/DC
Contact resistance: 10 mohms max
Dielectric strength: 1500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 04 thru 24
A = .118 [3.00] x No. of Spaces
B = .118 [3.00] x No. of Positions per Row + .276 [7.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	3/17/15
CHECKED	NC	3/17/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .118 [3.00] RIGHT VERTICAL HEADER DUAL ROW

SIZE	PART NO.	REV.
X	DML-XX-V-T-FL	-

REF:	SCALE:	SHEET
S00123T	NTS	1 OF 1