

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/10/15	
A		UPDATE DRAWING	12/15/20	LH/KC

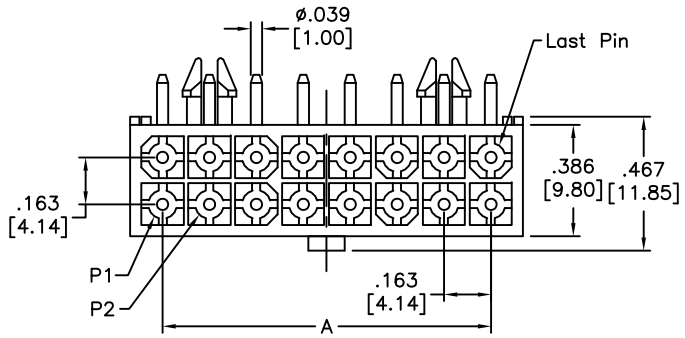

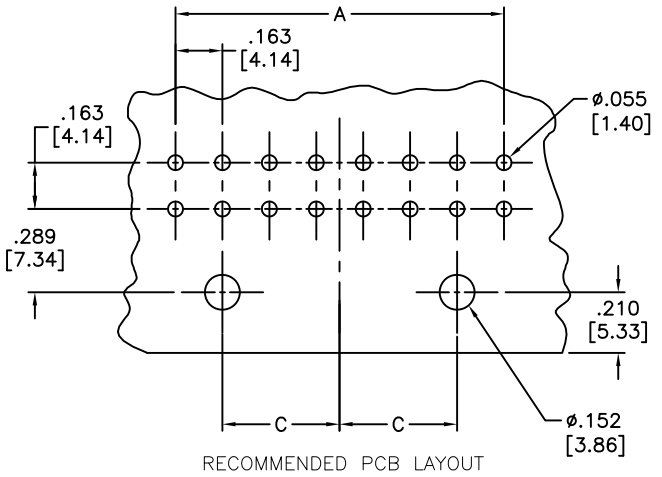

RECOMMENDED PCB LAYOUT

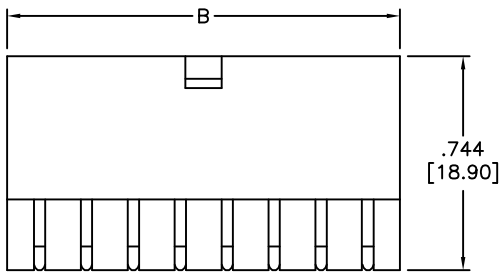

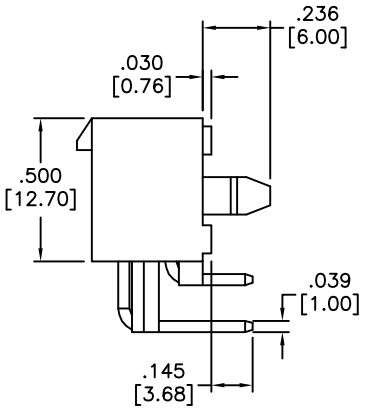

Positions: 04 thru 24
A= .163 [4.14] x No. of Spaces
B= .163 [4.14] x No. of Spaces +.224 [5.69]
C= 14, 18= .326 [8.28], 16, 20, 22, 24= .407 [10.35]

SPECIFICATIONS:

Material:
Insulator: Nylon 66, rated UL94V-0
Insulator color: Natural
Contacts: Brass

Plating:
Matte Tin over Nickel underplate overall

Electrical:
Voltage rating: 300V AC/DC.
Current rating: 5A AC/DC
Insulation resistance: 1000 MΩ min.
Dielectric withstanding voltage: 1500 VAC / minute

Temperature Rating:
Operating temperature: -25°C to +90°C

Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	2/10/15
CHECKED	KW	2/10/15
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: RIGHT ANGLE HOUSING, MALE TERMINAL PCB MOUNT WITH PEGS, 4.14mm


SIZE	PART NO.	REV.
X	DMM-XX-R-N-P-MT-V0	A

REF: S00123T | SCALE: NTS | SHEET 1 OF 2

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				

APPROVED: _____

DATE: _____ TITLE: _____

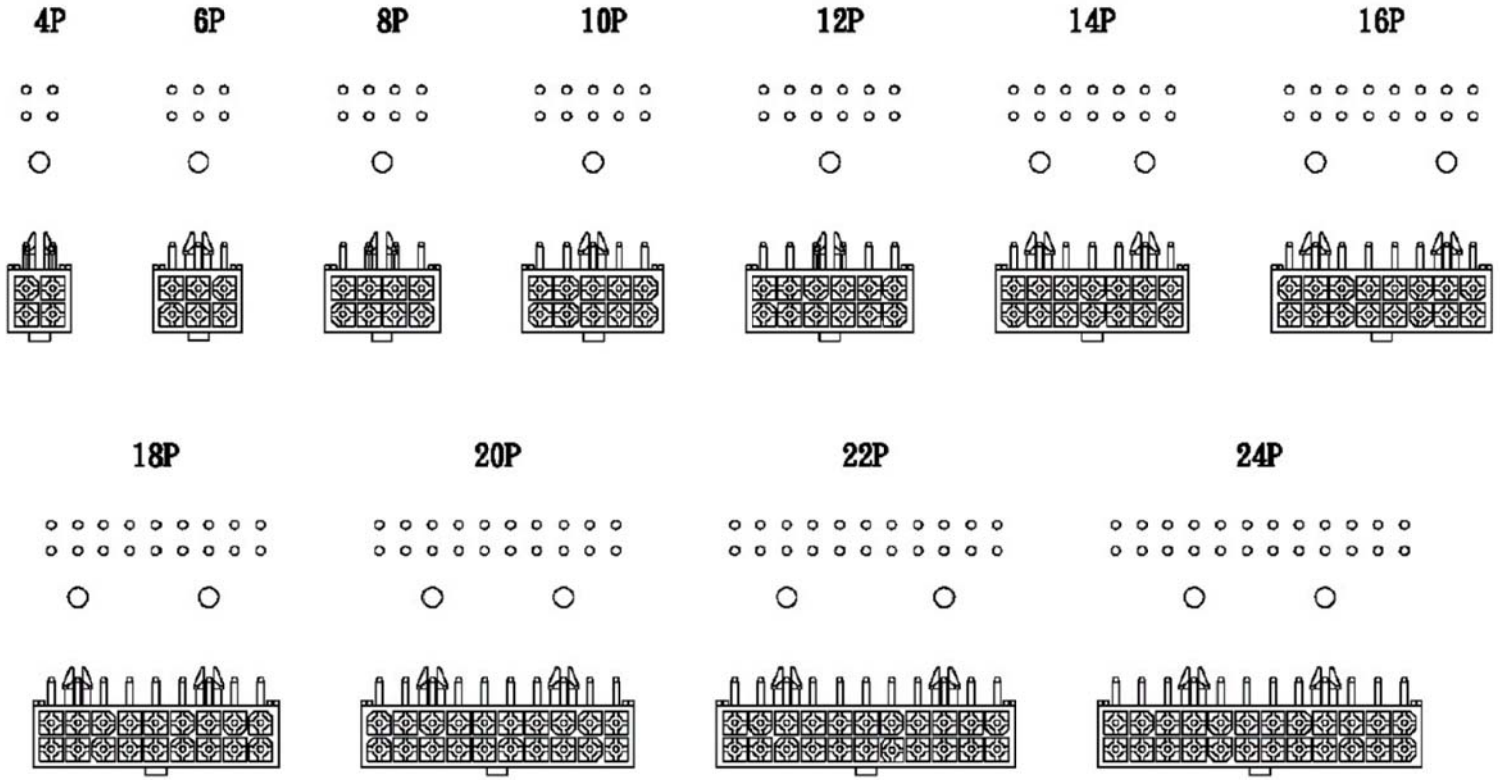

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	2/10/15
CHECKED	KW	2/10/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RIGHT ANGLE HOUSING, MALE TERMINAL PCB MOUNT WITH PEGS, 4.14mm

SIZE	PART NO.	REV.
X	DMM-XX-R-N-P-MT-V0	-

REF: S00123T | SCALE: NTS | SHEET 2 OF 2