

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	05/30/13	
A		UPDATED SPEC.	11/15/16	HR/MC

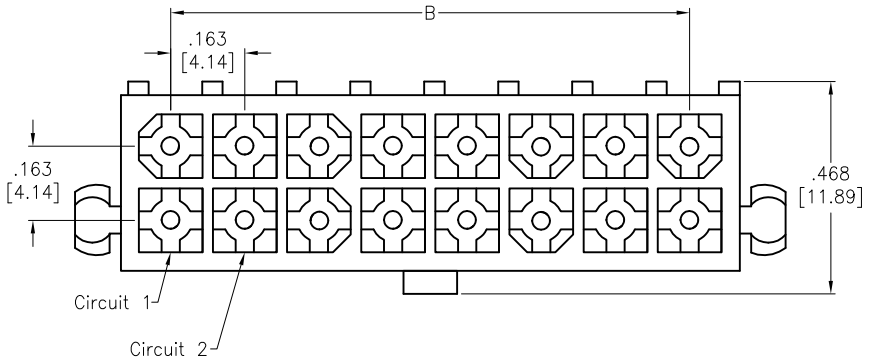

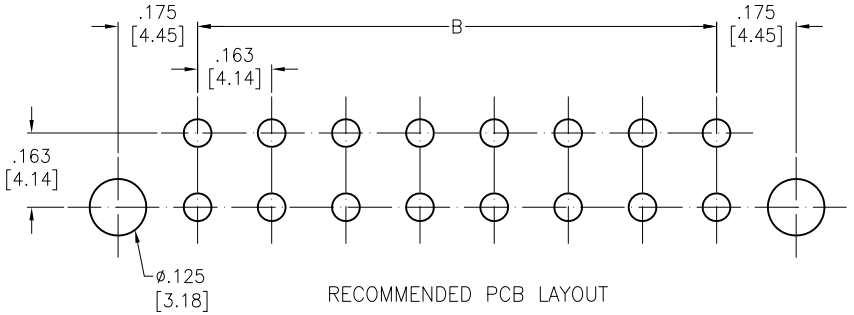

RECOMMENDED PCB LAYOUT

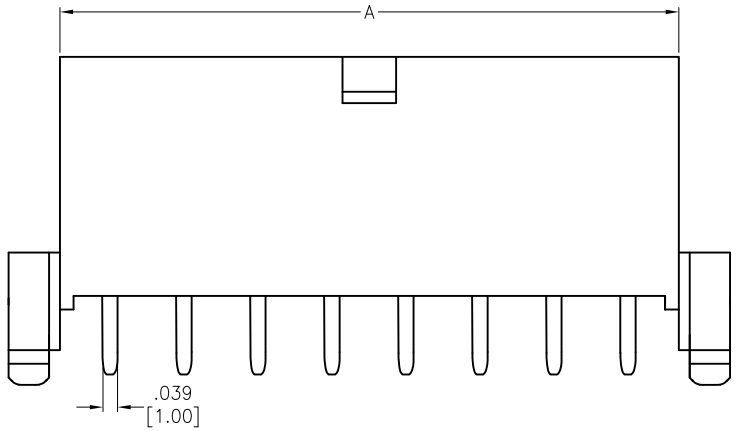

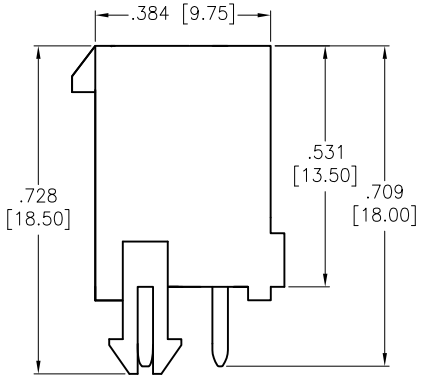

	Dim. A	Dim. B
14P	1.203 [30.56]	.978 [24.84]
16P	1.366 [34.70]	1.141 [28.98]
18P	1.529 [38.84]	1.304 [33.12]
20P	1.692 [42.98]	1.467 [37.26]
22P	1.855 [47.12]	1.630 [41.40]
24P	2.018 [51.26]	1.793 [45.54]

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL94V-0

Insulator color: Natural

Contacts: Brass

Plating:

Matte Tin over Nickel underplate overall

Electrical:

Operating voltage: 600V AC/DC

Current rating: 5A AC/DC

Contact resistance: 10 mohms max

Insulation resistance: 1000 MΩ min

Dielectric withstanding voltage: 1500 VAC / minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	05/30/13
CHECKED	YC	05/30/13
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: VERTICAL HOUSING, MALE TERMINAL PCB MOUNT WITH PEG, 4.14mm

SIZE	PART NO.	REV.
X	DMM-XX-S-N-P-V0	A

REF:	SCALE:	SHEET
S00123T	NTS	1 OF 1