

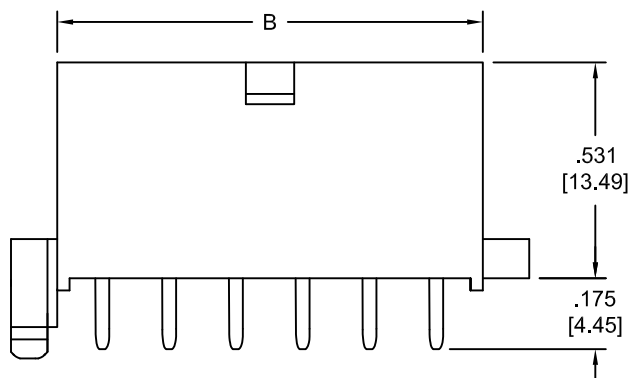
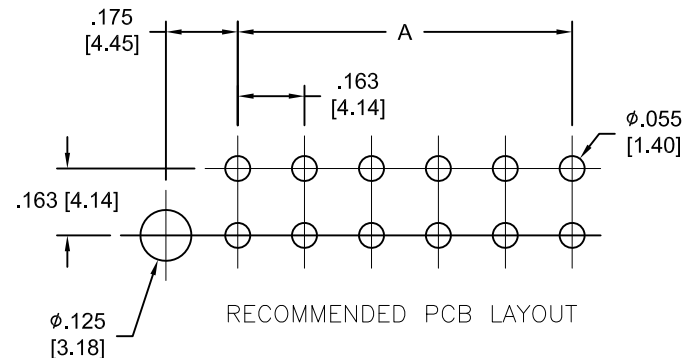


6 5 4 3 2 1

APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/12/18	

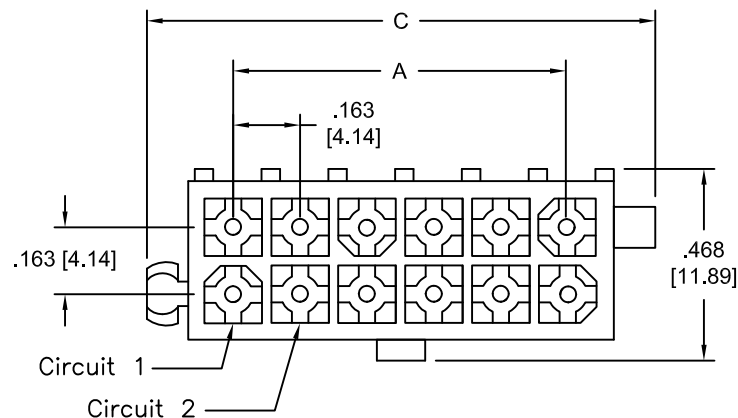

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL94V-0

Insulator color: Natural

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 600V AC/DC

Current rating: 5A AC/DC

Contact resistance: 10 mohms max

Insulation resistance: 1000 MΩ min

Dielectric withstanding voltage: 1500 VAC / minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 04 thru 12

A = .163 [4.14] x No. of Spaces

B = .163 [4.14] x No. of Spaces + .224 [5.69]

C = .163 [4.14] x No. of Spaces + .428 [10.87]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES HOLES				ADAM TECH INTERCONNECTS 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
TITLE					
VERTICAL HOUSING, MALE TERMINAL PCB MOUNT WITH PEG, 4.14mm					
SIZE X PART NO. DMM-XX-S-N-P1-G-V0 REV. A					
APPROVALS		DATE		REF: SCALE: NTS SHEET 1 OF 2	
DRAWN	HR	4/12/18			
CHECKED	KC	4/12/18			
APPROVED					

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #



Description

Date



Appr

SEE SHT 1 OF 2 FOR REVISION



4P





6P





8P



10P



12P

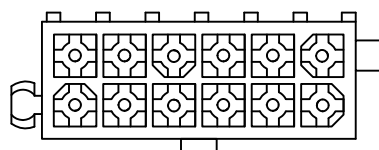

Wire Size	Circuits		
	4 ~ 6	8 & 10	12
#18	8A	7A	6A
#20	6A	5A	5A
#22	4A	4A	4A
#24	3A	3A	3A

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS

DATE

DRAWN

HR

4/12/18

CHECKED

KC

4/12/18

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

VERTICAL HOUSING, MALE TERMINAL
PCB MOUNT WITH PEG, 4.14mm

SIZE
X

PART NO.

DMM-XX-S-N-P1-G-V0

REV.
-

REF:

SCALE: NTS

SHEET 2 OF 2

6

5

4

3

2

1