
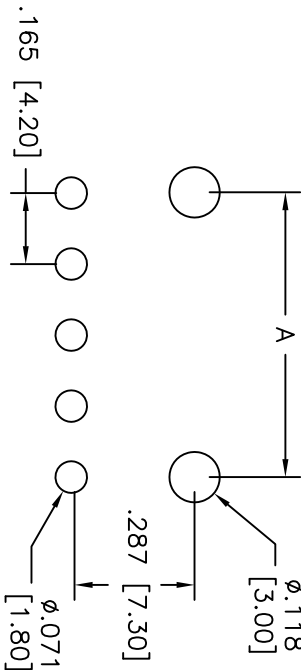



Rev	AWO #	Description	Date	Appr
-		RELEASED	7/22/10	

APPROVED: _____

DATE: _____ TITLE: _____

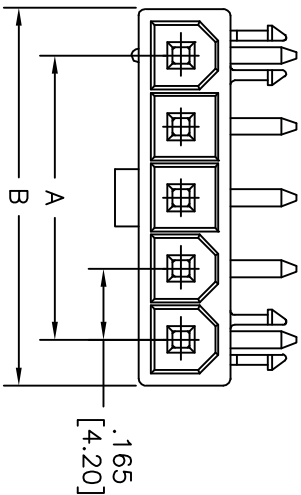

RECOMMENDED PCB LAYOUT

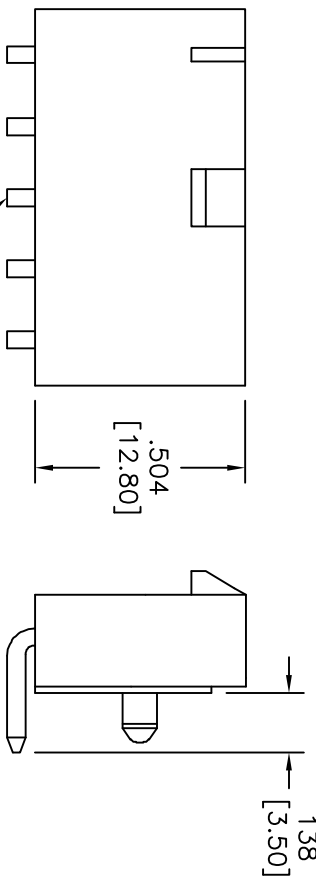

Current rating:

Wire Size AWG	Positions
#16	2,3 4~6 7~10 11,12
	9A 8A 7A 6A

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: Natural

Contact: Brass, Tin plated

Electrical:

Operating voltage: 600 VAC max

Current rating: 10 Amps max.

Dielectric withstanding voltage: 1500 VAC for 1 minute

Mechanical:

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.

Positions: 2 thru 12
A = .165 [4.20] x No. of Spaces
B = A + .213 [5.40]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
SINGLE ROW TYPE
.165 [4.20] RIGHT ANGLE HEADER

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED				INCHES				HOLES			
.X	± .10	ØX	± .10	.XX	± .020	ØXX	± .015	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE							
DRAWN	DR	7/22/10				SIZE	PART NO.				
CHECKED						X	DMRA-XX-T-1-B				
APPROVED						REF: S00123T	SCALE: NTS				

ROHS
COMPLIANT