

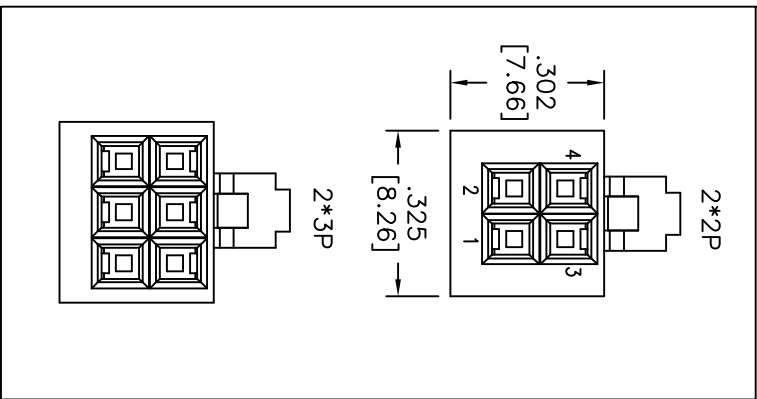
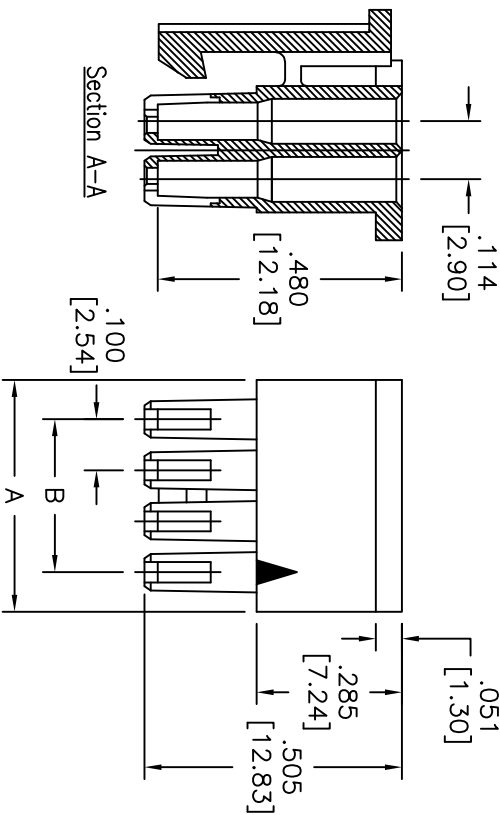
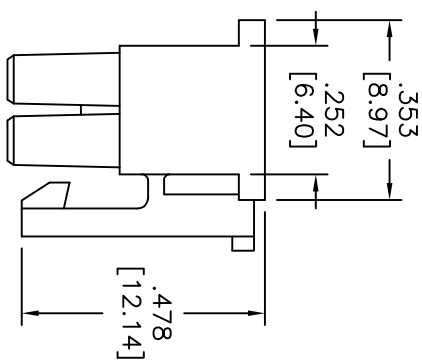


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	9632	RELEASED	6/25/10	
A	9632	REDRAWN	1/22/14	AV/SY



Positions: 2*02 thru 2*25
A = .100 [2.54] X No. of Positions per row + .055 [1.40]
B = .100 [2.54] X No. of Spaces

SPECIFICATIONS:

Material:
Insulator: PA66, rated UL 94V-2
Insulator color: White
Electrical:
Current rating: 3.0 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 1000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

PLUG HOUSING, .100 [2.54] PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
X	± .10	ØX	± .10	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	DY		6/25/10				
CHECKED							
APPROVED							
TITLE				REV.			
SIZE PART NO.				A			
X DMS-XX							
REF: 3000190							
SCALE: NTS							
SHEET 1 OF 1							