

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/8/19	


APPROVED: _____


DATE: _____ TITLE: _____

NUMBER OF POSITIONS	DIM. A	DIM. B
02	.118 [3.00]	.275 [7.00]
03	.236 [6.00]	.394 [10.00]
04	.354 [9.00]	.512 [13.00]
05	.472 [12.00]	.629 [16.00]
06	.591 [15.00]	.748 [19.00]
07	.709 [18.00]	.866 [22.00]
08	.827 [21.00]	.984 [25.00]
09	.954 [24.00]	1.102 [28.00]
10	1.063 [27.00]	1.220 [31.00]
11	1.181 [30.00]	1.340 [34.00]
12	1.299 [33.00]	1.456 [37.00]



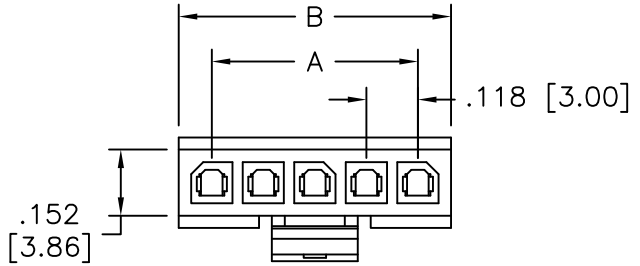



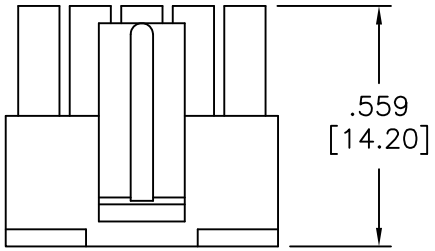

SPECIFICATIONS:

Material:

Insulator: Nylon, rated UL 94V–0, Glow wire compliant

Insulator color: Black

Electrical:

Voltage rating: 250 VAC RMS or DC

Current rating: 20 Awg: 5 Amps max
22 Awg: 5 Amps max
24 Awg: 4 Amps max
26 Awg: 3 Amps max
28 Awg: 2 Amps max
30 Awg: 1 Amp max.

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1500 VAC for 1 minute

Mechanical:

Wire size: 20 Awg thru 30 Awg

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	5/8/19
CHECKED	KC	5/8/19
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: FEMALE CRIMP HOUSING, SINGLE ROW
.118 [3.00] PITCH, GLOW WIRE

SIZE	PART NO.	REV.
X	DMT-1-XX-GW	-

REF:	SCALE:	SHEET
S00123T	NTS	1 OF 1