

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/21/10	


APPROVED: _____


DATE: _____ TITLE: _____

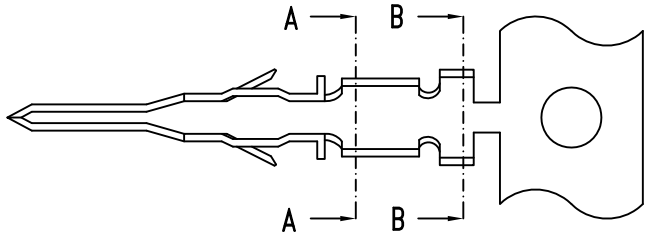



SEC. A–A

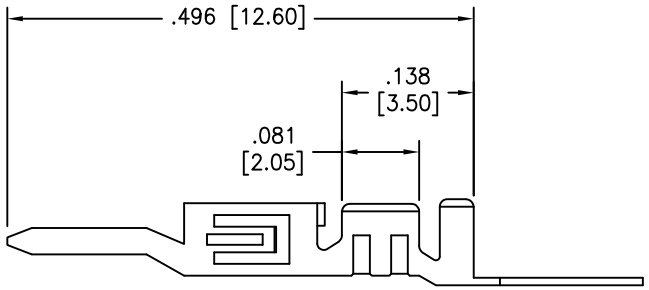



SEC. B–B

P/N	Wire size	Dim. a	Dim. b	Dim. c	Dim. d
DMT–A–C–M–T–R	#26~#30AWG	.071 [1.80]	.063 [1.60]	.094 [2.40]	.075 [1.90]
DMT–B–C–M–T–R	#20~#24AWG	.083 [2.10]	.083 [2.10]	.106 [2.70]	.094 [2.40]

SPECIFICATIONS:
Material:
Contact: Phosphor Bronze, 0.2mm thick
Plating: Tin over copper underplate overall.
Electrical:
Operating voltage: 250 VAC RMS max
Current rating: 20 Awg: 5 Amps max
22 Awg: 5 Amps max
24 Awg: 4 Amps max
26 Awg: 3 Amps max
28 Awg: 2 Amps max
30 Awg: 1 Amp max
Contact resistance: 10 mohms max.
Dielectric withstanding voltage: 1500 VAC for 1 minute
Temperature rise: 30° max.
Mechanical:
Wire size: 20 Awg thru 30 Awg
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	1/21/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .118" [3.0mm] CRIMP TERMINAL, TIN PLATED, ON REEL

SIZE	PART NO.	REV.
X	DMT-X-C-M-T-R	-

REF: S00004T | SCALE: NTS | SHEET 1 OF 1