


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/8/17	


APPROVED: _____

DATE: _____ TITLE: _____

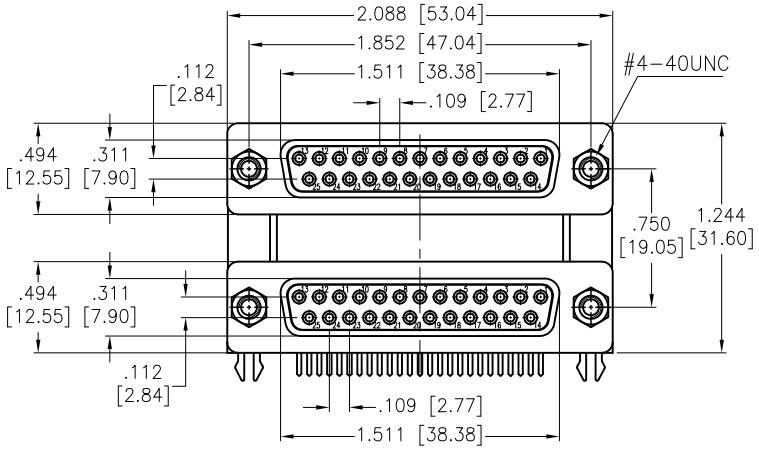

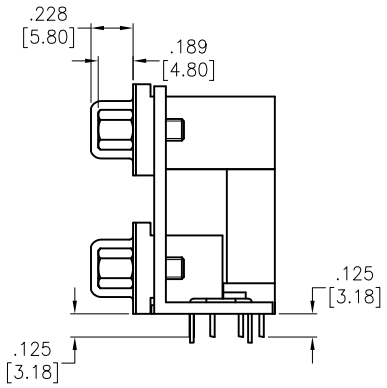

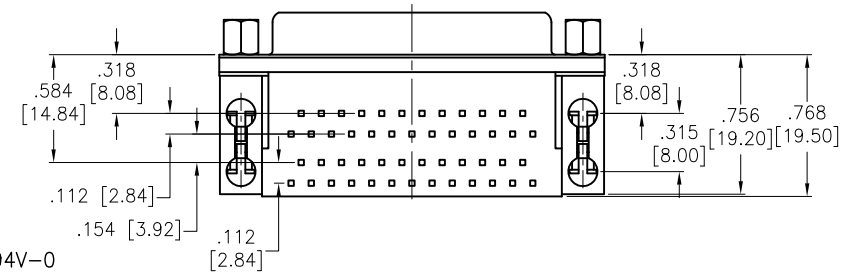

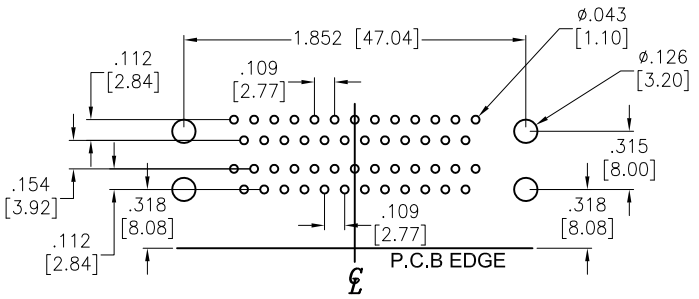

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Shell: SPCC, Nickel plated
Boardlock: Copper Alloy, Tin plated
Bracket: Zinc Alloy, Nickel plated
Screw: Copper Alloy, Nickel plated
Plating:
Gold flash over Nickel underplate in contact area, Tin over Nickel underplate on solder tails.
Electrical:
Operation Voltage: 250 VAC (RMS) max
Current rating: 3 Ampere per Contact
Contact resistance: 25 mohms max
Insulation resistance: 5,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC (RMS)
Temperature Rating:
Operating temperature: -55°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	11/8/17
CHECKED	IC	11/8/17
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DUAL PORT D-SUB, 25P FEMALE OVER 25P FEMALE, W/ JACKSCREWS

SIZE	PART NO.	REV.
X	DPD-25-00-B3-JS	-

REF: S00027T | SCALE: NTS | SHEET 1 OF 1