

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/7/18	


APPROVED: _____


DATE: _____ TITLE: _____

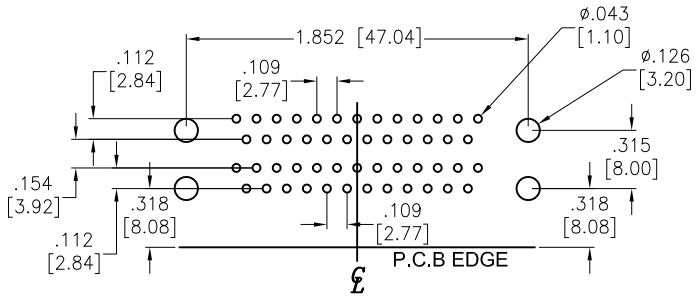

RECOMMENDED PCB LAYOUT

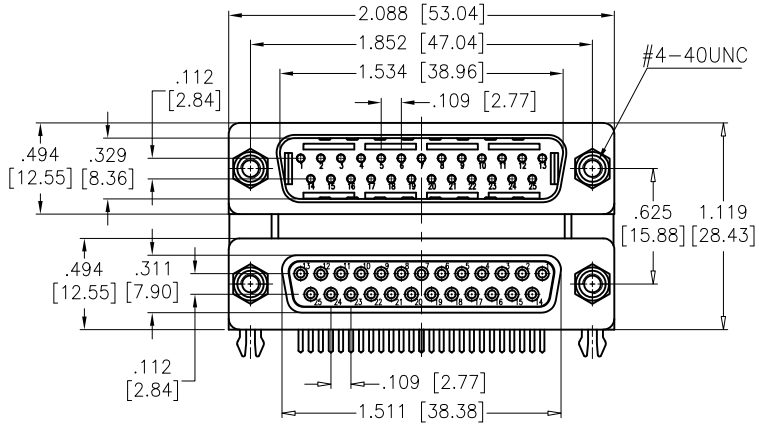



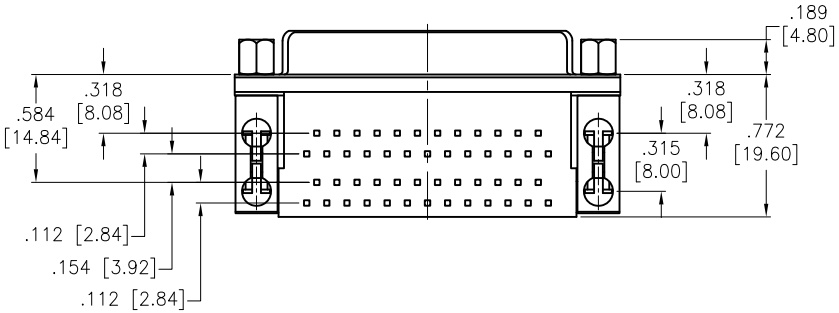

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Shell: SPCC, Nickel plated

Boardlock: Copper Alloy, Tin plated

Bracket: Zinc Alloy, Nickel plated

Screw: Copper Alloy, Nickel plated

Plating:

Gold flash over Nickel underplate in contact area, Tin over Nickel underplate on solder tails.

Electrical:

Voltage: 250 VAC (RMS) max

Current rating: 3 Ampere per Contact

Contact resistance: 25 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC (RMS)

Temperature Rating:

Operating temperature: -55°C to +85°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	11/7/18
CHECKED	TY	11/7/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: DUAL PORT D-SUB, 25P MALE OVER 25P FEMALE, W/ JACKSCREWS

SIZE	PART NO.	REV.
X	DPD-25-10-C3-JS	-

REF: S00087T | SCALE: NTS | SHEET 1 OF 1