

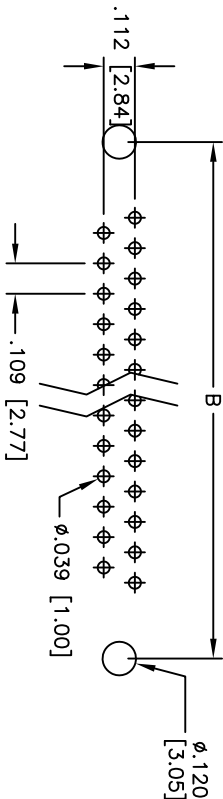
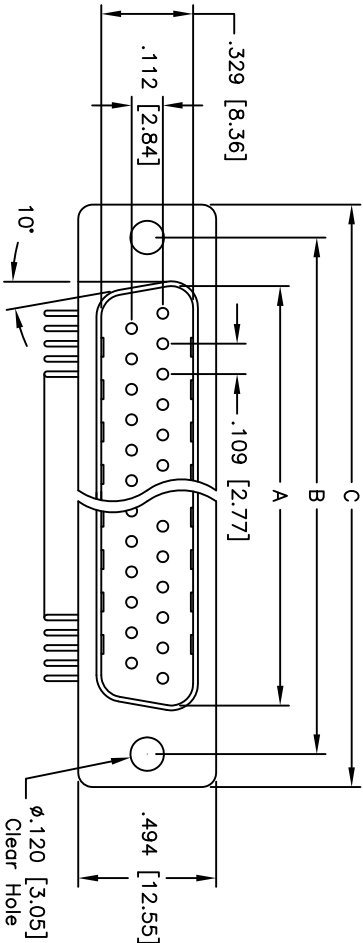


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/22/05	
A		CHART UPDATE	4/21/06	
B		REDRAWN	9/4/12	

APPROVED: _____
DATE: _____ TITLE: _____

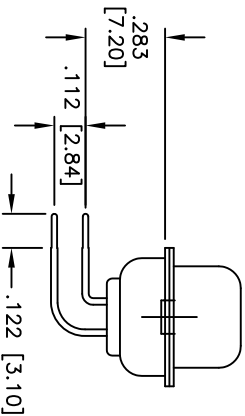

RECOMMENDED PCB LAYOUT

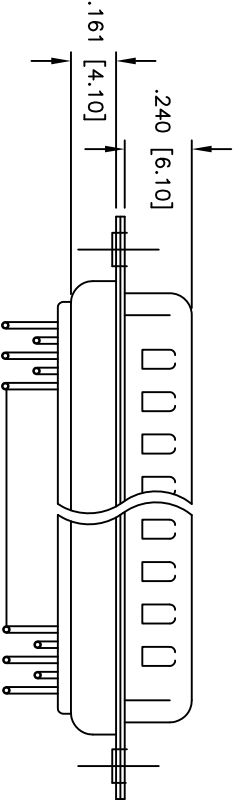

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: White
Contacts: Copper Alloy
Shell: Steel, Tin plated
Plating: Gold flash over Nickel underplate overall
Electrical: Operating voltage: 250 VAC max
Current rating: 5 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating: Operating temperature: -65°C to +125°C
Environmental: Lead free, RoHS compliant

DXXX	NO. OF CONTACTS	DIMENSIONS		
		A	B	C
DE09	9	.666 [16.92]	.984 [24.99]	1.213 [30.81]
DA15	15	.994 [25.25]	1.311 [33.30]	1.543 [39.20]
DB25	25	1.534 [38.96]	1.852 [47.04]	2.089 [53.05]
DC37	37	2.182 [55.42]	2.500 [63.50]	2.732 [69.40]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .283 [7.20] FOOTPRINT R/A D-SUB PLUG
MACHINED CONTACTS, 120 [3.05] HOLES

DRAWN	SS	4/22/05
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	DXXX-PH-C1C	B
REF:	S00087T	SCALE: NTS
		SHEET 1 OF 1