

6

5

4

3





2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/6/07	

APPROVED: _____

DATE: _____ TITLE: _____

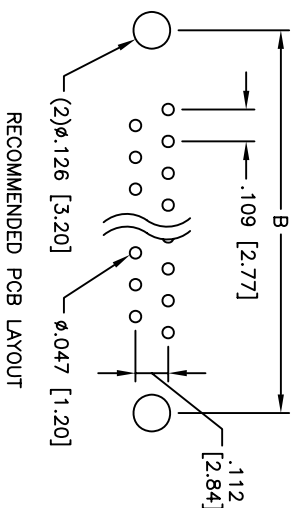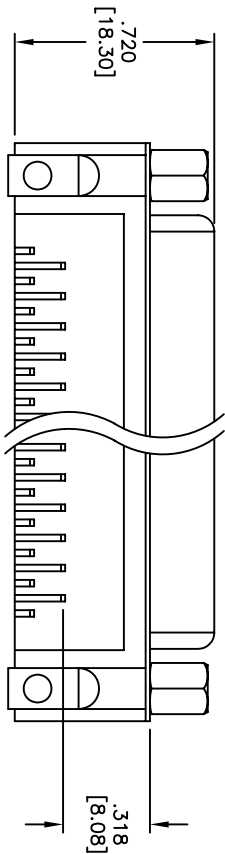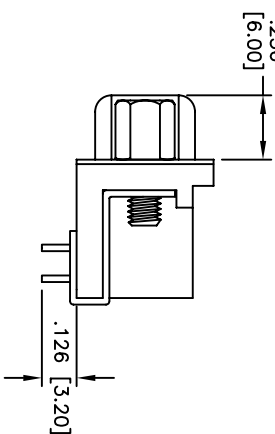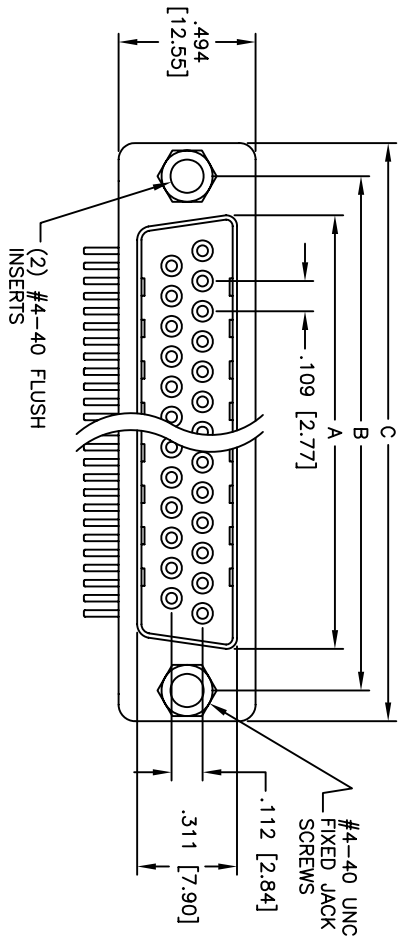

Unit: Inch / mm

Positions	SOCKET		DIMENSIONS		
	A	B	C		
9	.643 [16.33]	.984 [24.99]	1.213 [30.81]		
15	.971 [24.66]	1.312 [33.32]	1.541 [39.14]		
25	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]		
37	2.159 [54.84]	2.500 [63.50]	2.729 [69.32]		

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Steel, Nickel plated

Hardware: Brass, Nickel plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

.318 [8.08] FOOTPRINT D-SUB RECEPTACLE

FULL GROUNDSTRAPS, #4-40 JACK SCREWS

SIZE PART NO.

X DXXX-SL-13

REV.

1

A

B

C

D

A

B

C

D

6

5

4

3

2

1