
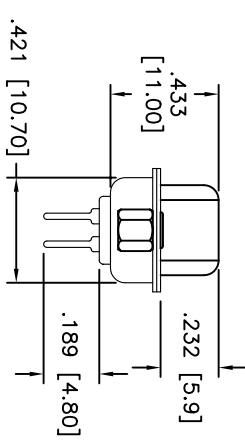
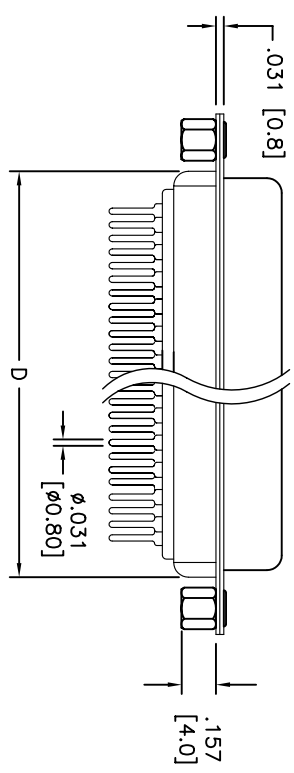
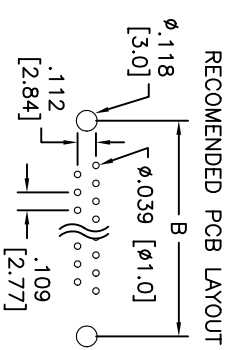


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/19/04	

APPROVED: _____
 DATE: _____ TITLE: _____

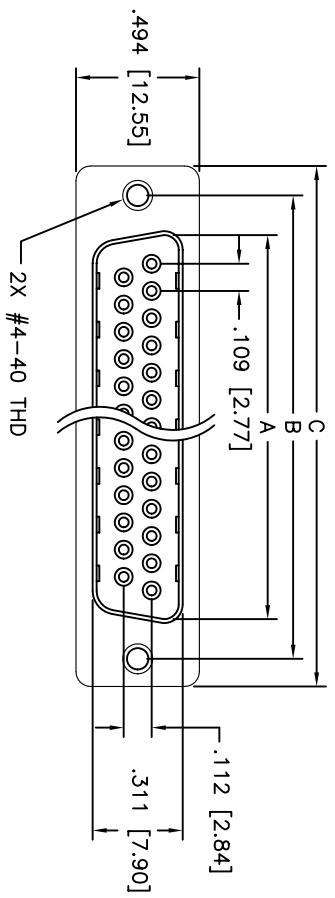

DXXX	NO. OF CONTACTS	DIMENSION			
		A	B	C	D
DE09	9	.642 [16.33]	.984 [25.00]	1.21 [30.81]	.76 [19.20]
DA15	15	.969 [24.66]	1.312 [33.32]	1.54 [39.20]	1.09 [27.70]
DB25	25	1.508 [38.38]	1.852 [47.04]	2.09 [53.10]	1.62 [41.10]
DC37	37	2.157 [54.84]	2.500 [63.5]	2.73 [69.40]	2.26 [57.30]

SPECIFICATIONS:
 Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold Flash over Nickel underplate overall
 Electrical: Operating voltage: 250 VAC max
 Current rating: 5 Amps max
 Contact resistance: 20 mohms max @ 500 VDC
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating: Operating temperature: -65°C to +125°C
 Environmental: Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .XX ± .10 ØXX ± .015
 .XXX ± .015 ØXXX ± .010
 APPROVALS: _____ DATE: _____
 DRAWN: SS 10/19/04
 CHECKED: _____
 APPROVED: _____

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB, STRAIGHT, FEMALE,
 STANDARD TAILS, GOLD FLASH PLATED

SIZE: PART NO. DXXX-ST-1-SL REV. -
 X
 REF: SCALE: NTS SHEET 1 OF 1