


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/24/09	
A		REDRAWN	03/13/12	

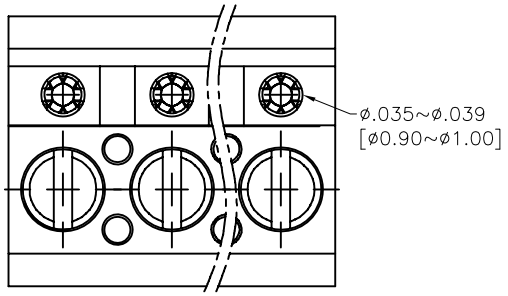

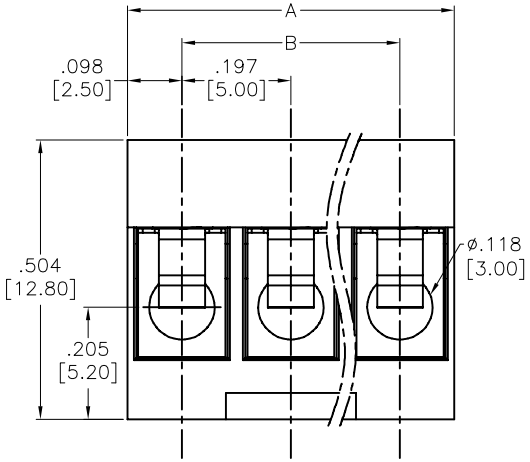

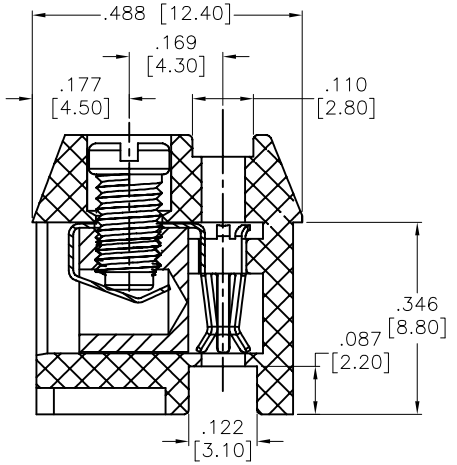

SPECIFICATIONS:

Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Green
Clamp: Brass, Nickel plated
Contact: Phosphor Bronze, Tin plated
Screw: Steel, M3/Zn Plated
Electrical:
Operation voltage: 300 VAC
Current rating: 10 Amps
Withstanding Voltage: 1.6KV
Mechanical:
Solid wire (AWG): 12–26
Stranded wire (AWG): 12–26
Torque(Lb–In): 3.5
Wire strip length (mm): 6–7
Temperature Rating:
Operating temperature: –40°C to +115°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 02 thru 12
A= .197 [5.00] x No. of Positions
B= .197 [5.00] x No. of Spaces

	Tolerance
2–5P	±.006 [0.15]
6–9P	±.010 [0.25]
10–12P	±.012 [0.30]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	4/24/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, WIRE PROTECTOR TYPE, .197 [5.00] PITCH

SIZE	PART NO.	REV.
X	EB103-XX-C	A

REF:	SCALE:	SHEET
S00007T	NTS	1 OF 1