

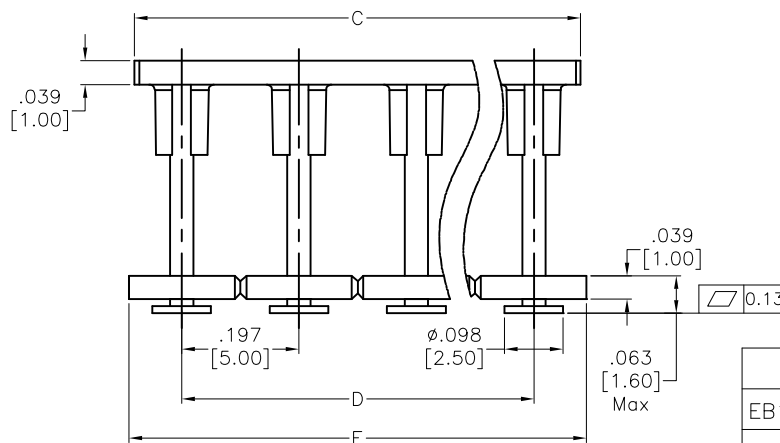


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/29/11	
A		REVISED SPEC.	12/9/11	
B		UPDATE DRAWING	12/18/15	AY/LL
C		UPDATE SPEC.	4/8/20	AY/BL

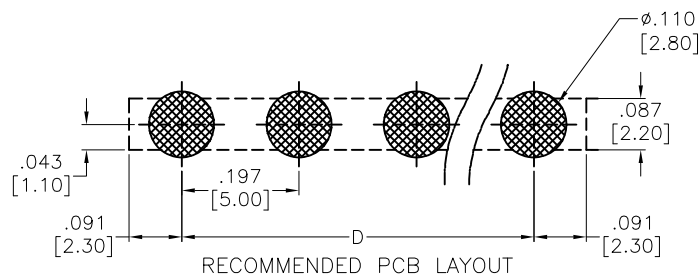

ADAM P/N	Dim A	Dim B
EB129-XX-C-1-T/R	.400 [10.15]	.423 [10.75]
EB129-XX-C-2-T/R	.409 [10.40]	.433 [11.00]
EB129-XX-C-3-T/R	.610 [15.50]	.634 [16.10]
EB129-XX-C-4-T/R	.555 [14.20]	.583 [14.80]

Positions: 2 thru 12

C = .197 [5.00] x No. of Positions - .039 [1.00]

D = .197 [5.00] x No. of Spaces

E = .197 [5.00] x No. of Positions - .020 [0.50]

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Cover: Hi-temp thermoplastic, rated UL 94V-0

Contact: Brass, Tin plated

Electrical:

Voltage rating: 300 V

Current rating: 10A

Withstanding Voltage: 1.6KV

Temperature Rating:

Operating temperature: -45°C to +65°C

Environmental:

Lead free, RoHS compliant.

PACKAGED ON TAPE & REEL

	Dim C	Dim D	Dim E
2-3P	±.006 [0.15]	±.004 [0.10]	±.006 [0.15]
4-7P	±.008 [0.20]	±.008 [0.20]	±.008 [0.20]
8-12P	±.010 [0.25]	±.010 [0.25]	±.010 [0.25]



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X	±.10	Ø.X	±.10
.XX	±.020	Ø.XX	±.015
.XXX	±.015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	11/29/11
CHECKED	AY	11/29/11
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

EURO BLOCK, .197 [5.00] PITCH

SIZE X	PART NO. EB129-XX-C-X-T/R	REV. C
REF: S00007T	SCALE: NTS	SHEET 1 OF 1