




Rev	AWO #	Description	Date	Appr
-		RELEASED	12/2/14	

APPROVED: _____

DATE: _____ TITLE: _____

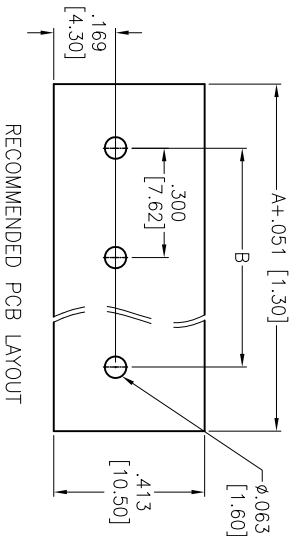

RECOMMENDED PCB LAYOUT

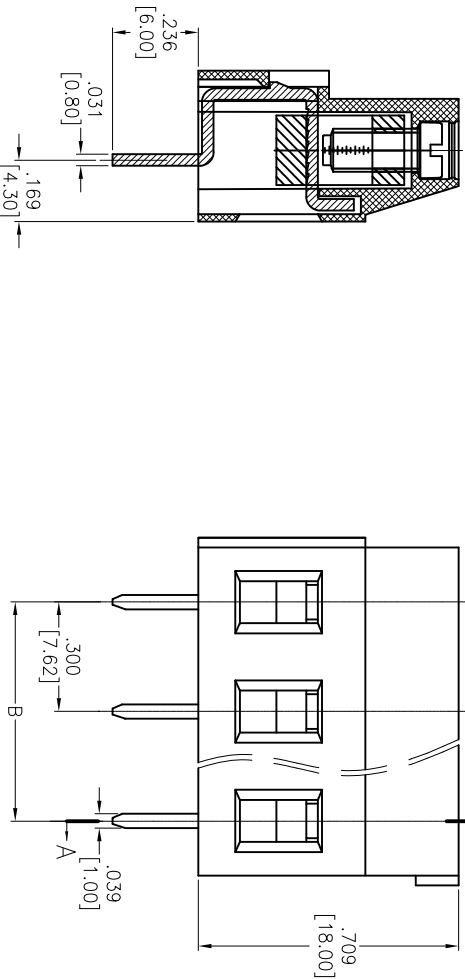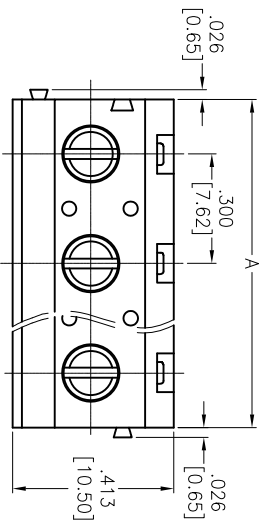

SECTION A-A

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Screw: Steel, M3.0/Zinc plated

Wire guard: Brass, Nickel plated

Pin Header: Brass, Tin plated

Electrical:

Voltage rated: 300 VAC

Current rated: 16 Amps

Contact resistance: 20 mΩ

Insulation resistance: 500 MΩ @ 500 VDC

Withstanding voltage: 2000V AC/1 Min

Mechanical:

Solid wire: 26-12AWG 2.5mm²

Torque (Lb-in): 0.5Nm (4.5lb-in)

Steep Length: 6-7mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.

Positions: 02 thru 24
A = .300 [7.62] x No. of Positions
B = .300 [7.62] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES EXCEPT AS NOTED

INCHES
.X ± .10 ØX ± .10
.XX ± .020 ØXX ± .015
.XXX ± .015 ØXXX ± .010

TITLE

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, .300 [7.62] PITCH

APPROVALS	DATE	SIZE	PART NO.	REV.
DRAWN	AY	12/2/14	EB147A-XX-G	-
CHECKED	SC	12/2/14		
APPROVED				

REF:	S00067C	SCALE:	NTS	SHEET	1 OF 1
------	---------	--------	-----	-------	--------

