


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/9/15	
A		UPDATE SPEC.	10/19/17	AY/IC

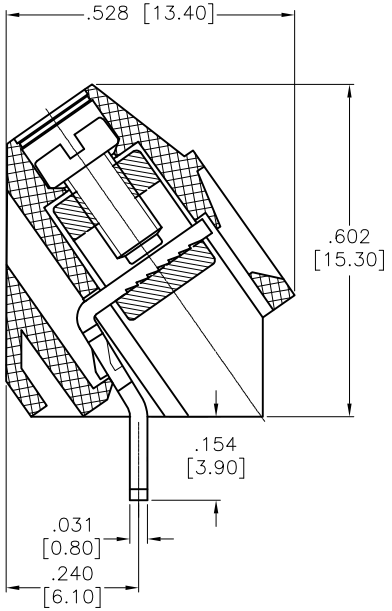

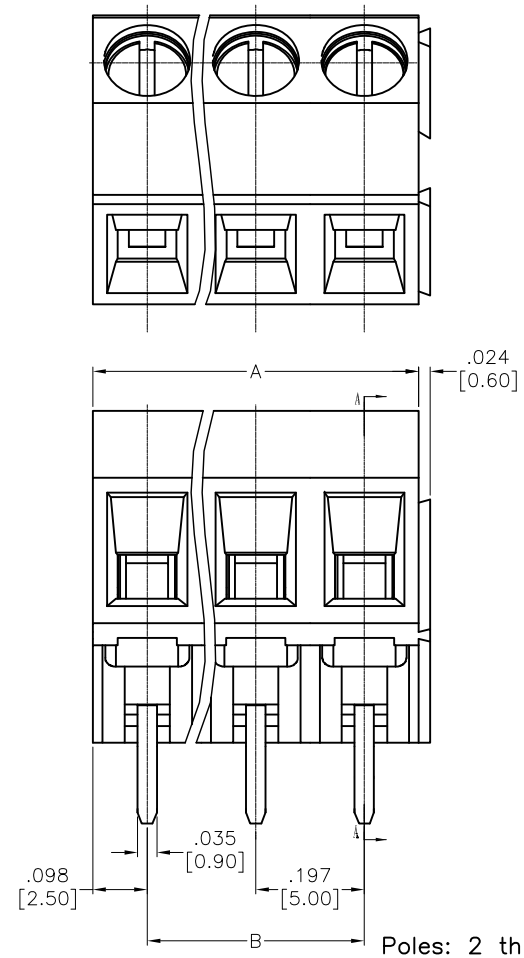

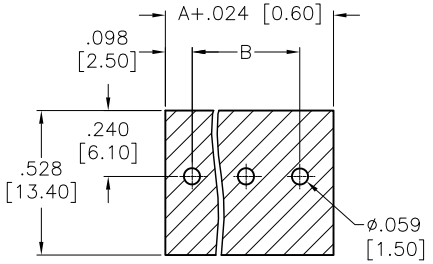

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Green
Screw: M2.5 Steel, Zinc plated
Contact: Copper Alloy, Tin plated
Cage: Copper Alloy, Nickel plated
Electrical:
Voltage rating: 300 V
Current rating: 16 A
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min @ 500 VDC
Dielectric withstanding voltage: 2,000 VAC for 1 minute
Mechanical:
Wire Range: 24-12AWG, 2.5mm²
Torque: 0.4N-m, 3.6Lb-In
Wire strip length: 6-7mm
Temperature Rating:
-40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Poles: 2 thru 24
A = .197 [5.00] X No. of Positions
B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	6/9/15
CHECKED	SC	6/9/15
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE

EURO BLOCK, .197" [5.00] PITCH, STACKABLE

SIZE	PART NO.	REV.
X	EB17A-XX-C	A

REF:	SCALE:	SHEET
S00067C	NTS	1 OF 1