
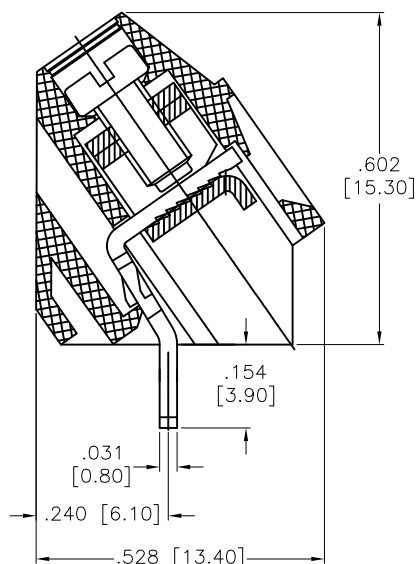
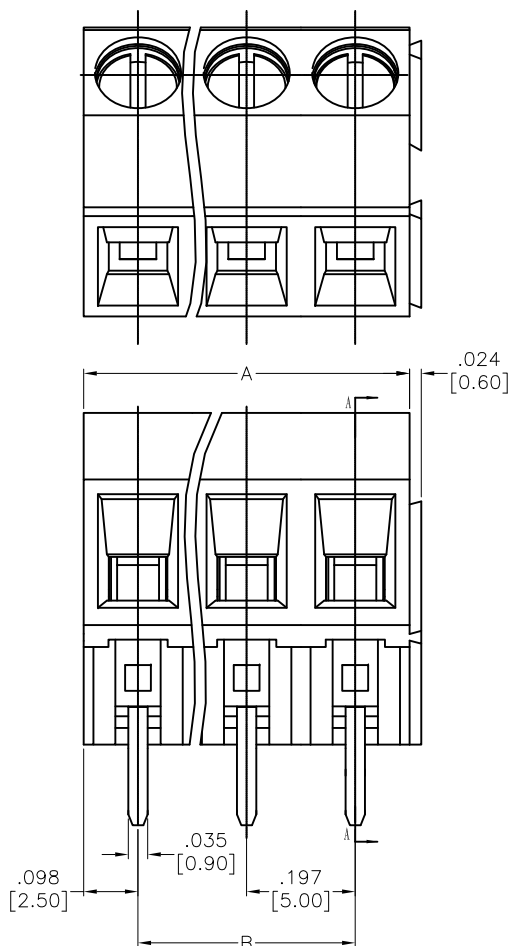


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/19/18	

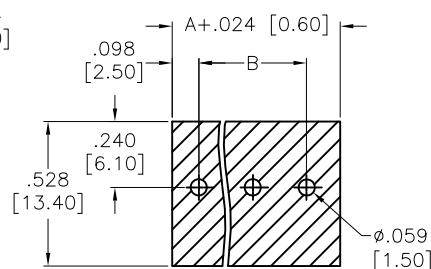

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Screw: M2.5 Steel, Zinc plated

Contact: Brass, Tin plated

Cage: Steel, Zinc plated

Electrical:

Voltage rating: 300 V

Current rating: 10 A

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Mechanical:

Wire Range: 24-12AWG, 2.5mm²

Torque: 0.4N-m, 3.6Lb-in

Wire strip length: 6-7mm

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Poles: 2 thru 24

A = .197 [5.00] X No. of Positions

B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	12/19/18
CHECKED	LW	12/19/18
APPROVED		

**ADAM
TECH
INTERCONNECTS**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

EURO BLOCK, .197" [5.00] PITCH, STACKABLE

SIZE	PART NO.	REV.
X	EB17B-XX-C	-
REF: S00067C	SCALE: NTS	SHEET 1 OF 1