

6

5

4

3




2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/23/20	

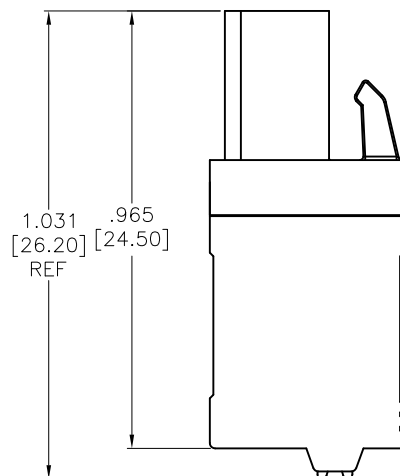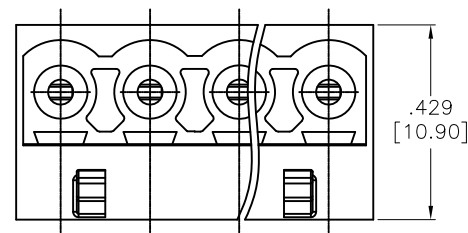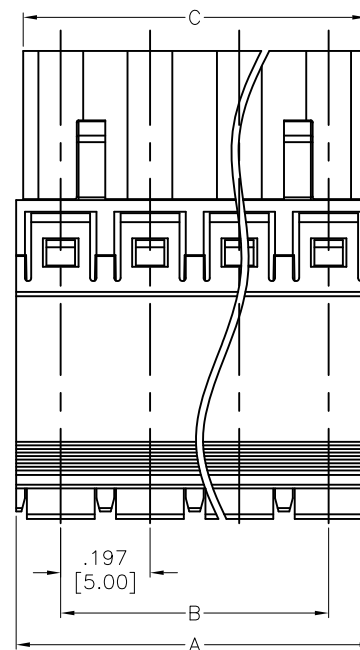

Positions: 02 thru 24

A = .197 [5.00] x No. of Positions

B = .197 [5.00] x No. of Spaces

C = .197 [5.00] x No. of Spaces + .165 [4.20]

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contacts: Copper Alloy, Tin plated

Electrical:

Voltage rated: 300 V

Current rated: 12 A

Withstanding voltage: 1600V AC/1 Min

Mechanical:

Wire range: 24-16AWG

Steip Length: 11~12 mm

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS

DATE

DRAWN

AY

10/23/20

CHECKED

DH

10/23/20

APPROVED

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

EURO BLOCK, .197 [5.00] PITCH, SPRING CLAMP
PLUGGABLE SYSTEM

SIZE

X

PART NO.

EB187A-XX-C

REV.

-

REF: S00067C

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1