


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	9427	RELEASED	3/20/09	
A	9427	REDARW	8/17/11	





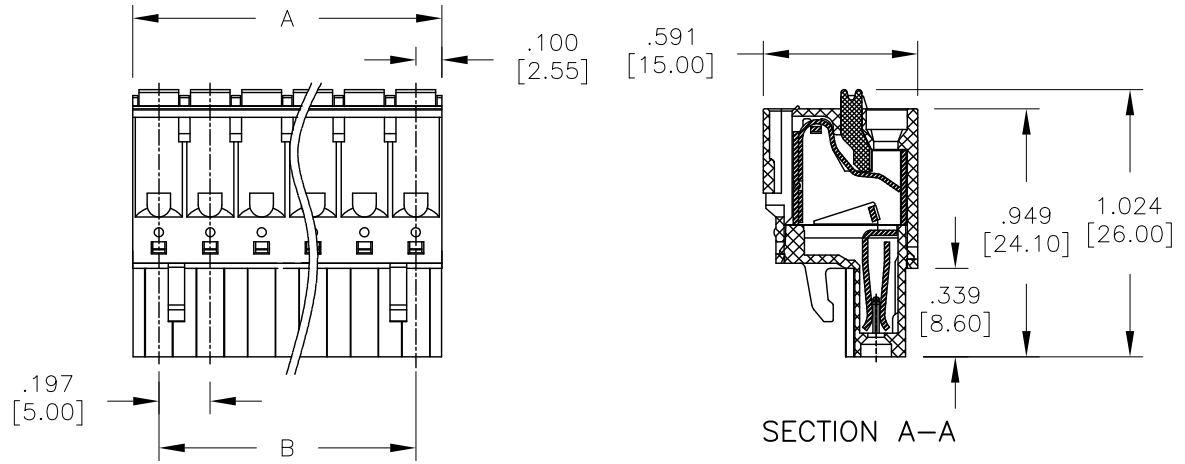

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Green
Wire guard: Stainless Steel
Contact: Phosphor Bronze, Tin plated
Electrical:
Operation voltage: 300 VAC
Current rating: 10 Amps
Solid wire (AWG): 12–26
Stranded wire (AWG): 12–26
Wire strip length: 8–9mm
Withstanding Voltage: 1.6KV
Environmental:
Operating temperature: –40°C to +115°C
Lead free, RoHS compliant.
Recommended soldering temp: 250°C for 5 sec.

RoHS COMPLIANT

Poles: 2 thru 24
A = .197 [5.00] X No. of Positions +.004 [0.10]
B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	3/20/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
TERMINAL BLOCK, SPRING FOR PLUGGABLE, 5.00MM PITCH, CONTACT ON DOWN SIDE

SIZE	PART NO.	REV.
X	EB2-XX-M-C-CSD	A

REF:	SCALE:	SHEET
S00007T	NTS	1 OF 1