

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/14/11	
A		REVISED POSITIONS	01/12/12	
B		REVISED DIM.	9/9/14	AY/GC

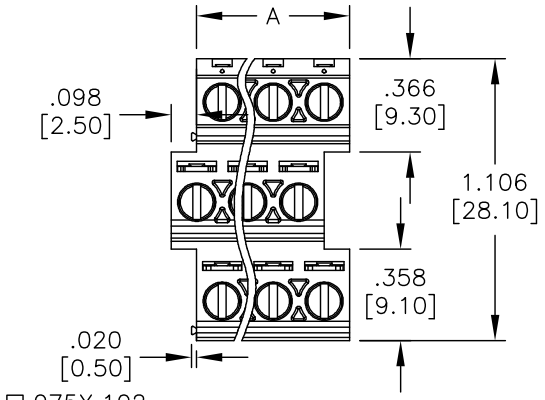

	DIM A	DIM B
6–21P	±.008 [0.20]	±.006 [0.15]
24–36P	±.010 [0.25]	±.008 [0.20]
39–54P	±.012 [0.30]	±.010 [0.25]
57–72P	±.016 [0.40]	±.012 [0.30]

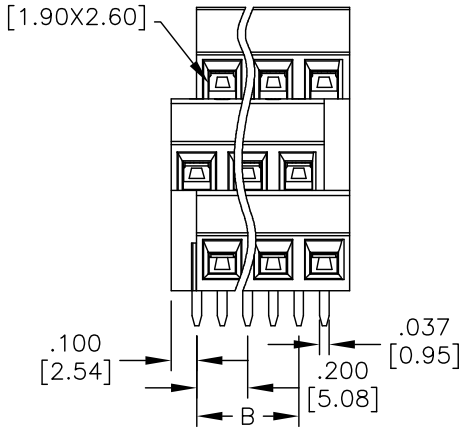

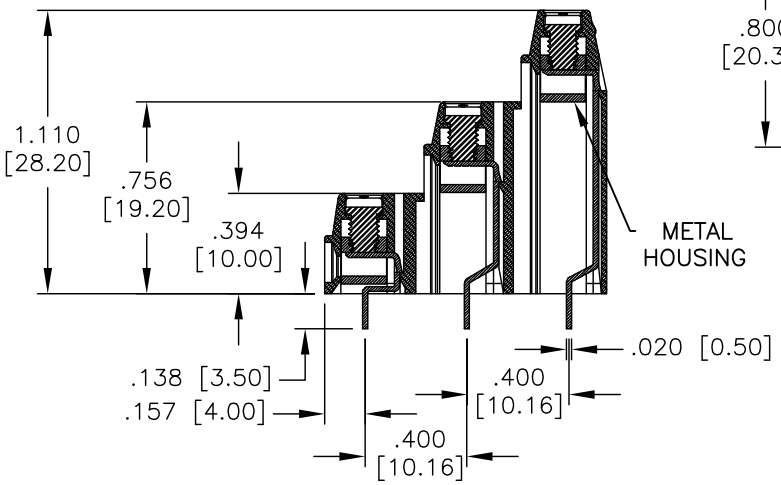

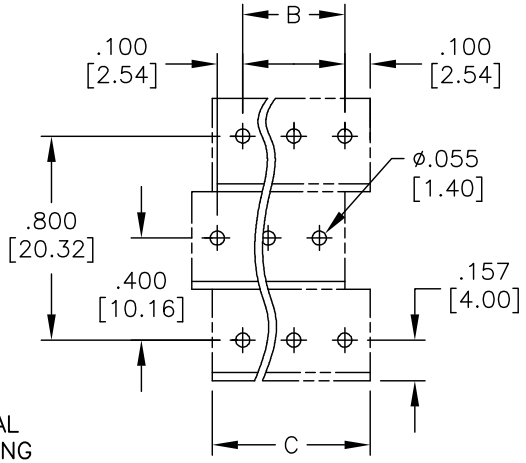

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Green
Metal housing: Brass , Nickel plated
Screw: M3.0, Steel, Zn plated.
Contact: Brass, Tin plated.
Electrical:
Operation voltage: 300 VAC
Current rating: 10 Amps
Mechanical:
Torque (Lb–In): 3.5
Wire Range: 14–24 Awg
Withstanding Voltage: 1.6KV
Environmental:
Operating temperature: –40°C to +115°C
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 3x02 thru 3x24
A = .200 [5.08] X No. of Positions Per Row
B = .200 [5.08] x No. of Spaces
C = .200 [5.08] X No. of Positions Per Row + .020 [0.50]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	9/14/11
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908–687–5000 Fax: 908–687–5710

TITLE: EURO BLOCK, .200" [5.08] PITCH

SIZE	PART NO.	REV.
X	EB23-XX-D-SB	B

REF: S00007T | SCALE: NTS | SHEET 1 OF 1