

APPROVED: _____


DATE: _____ TITLE:


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/06/09	
A		REDRAWN	11/09/11	
B		REVISED POSITIONS	01/12/12	

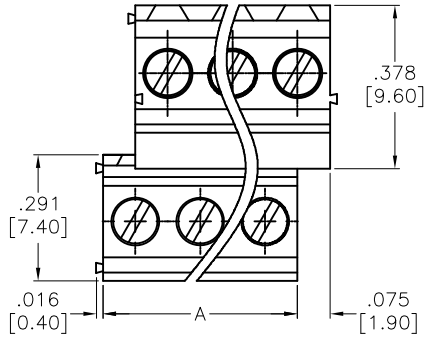

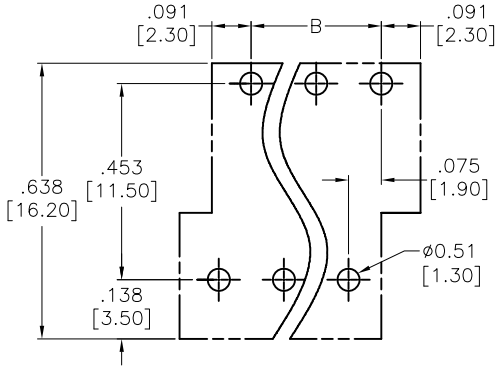

RECOMMENDED PCB LAYOUT

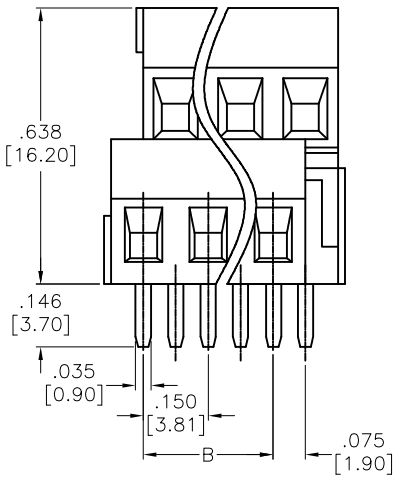

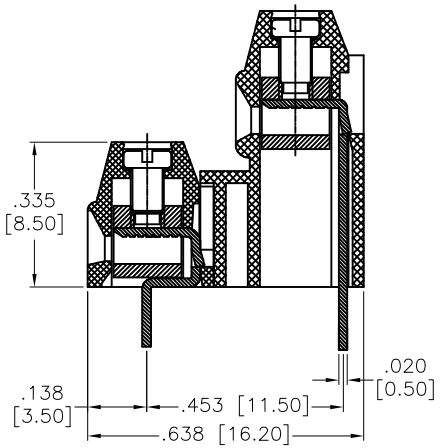

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, rated UL 94V-0
Insulator color: Green
Clamp: Brass, Nickel plated
Contact: Brass, Tin plated
Screw: Steel, M2/Zn plated
Electrical:
Operation voltage: 300 VAC
Current rating: 10 Amps
Withstanding Voltage: 1.6KV
Mechanical:
Solid wire(AWG): 16-24
Stranded wire(AWG): 16-24
Torque(Lb-In): 1.7
Wire strip length(mm): 5-6
Temperature Rating:
Operating temperature: -40°C to +115°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 2x02 thru 2x24
A= .150 [3.81] x No. of Positions Per Row
B= .150 [3.81] x No. of Spaces

	Tolerance
2x2-2x6P	±.006 [0.15]
2x7-2x12P	±.008 [0.20]
2x13-2x18P	±.010 [0.25]
2x19-2x24P	±.012 [0.30]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	3/06/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, .150 [3.81] PITCH

SIZE	PART NO.	REV.
X	EB25-XX-B-L	B

REF: S00007T | SCALE: NTS | SHEET 1 OF 1