

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/11/17	


APPROVED: _____


DATE: _____ TITLE: _____

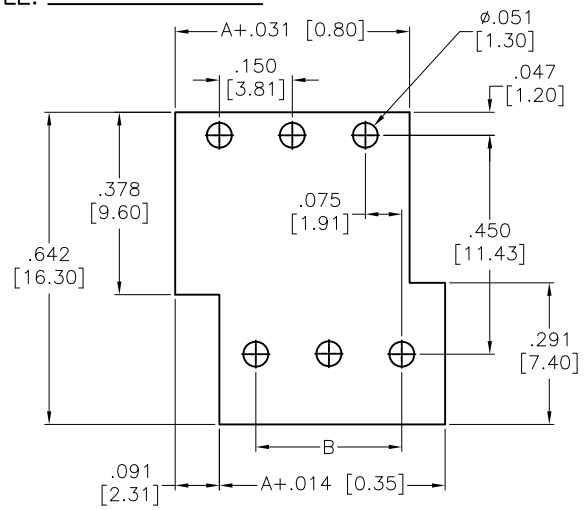

RECOMMENDED PCB LAYOUT

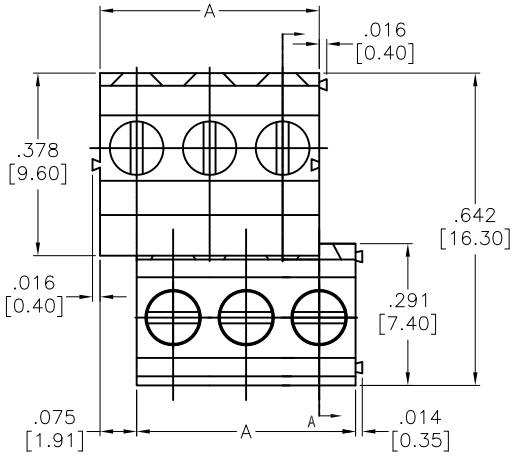

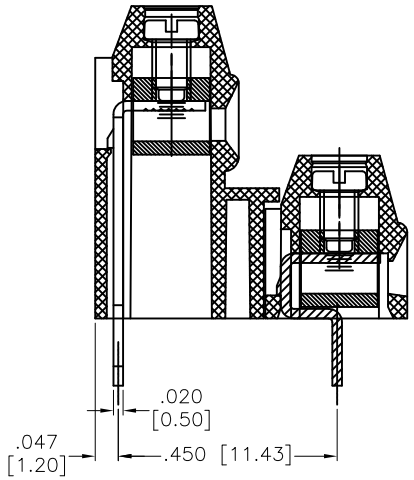

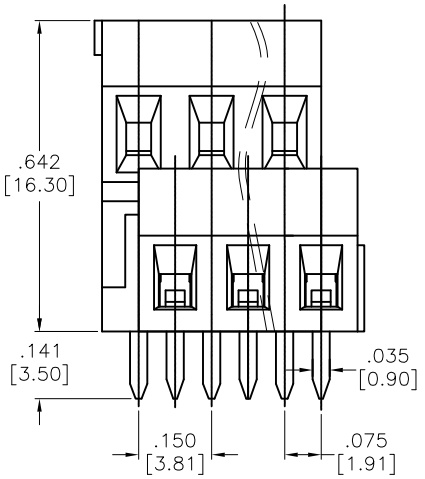

SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL 94V-0
Insulator color: Green
Contacts: Brass, Tin plated
Screws: M2.0 Steel, Zinc plated
Cage: Brass, Nickel plated
Electrical:
Voltage rating: 300V
Current rating: 10 A
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min @ 500 VDC
Dielectric withstanding voltage: 2,000 VAC for 1 minute
Mechanical:
Wire range: 28-16AWG, 1.0mm²
Torque: 0.2N-m, 1.8Lb-in
Strip Length: 4-5mm
Environmental:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 2x02 thru 2x24
A= .150 [3.81] x No. of Positions Per Row
B= .150 [3.81] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	7/11/17
CHECKED	RT	7/11/17
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, .150 [3.81] PITCH

SIZE	PART NO.	REV.
X	EB25A-XX-B-R	-

REF: S00067C | SCALE: NTS | SHEET 1 OF 1