

6

5

4

3

2




1

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/21/14	

APPROVED: _____


DATE: _____ TITLE: _____

D

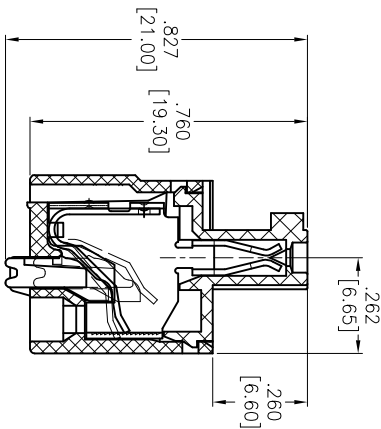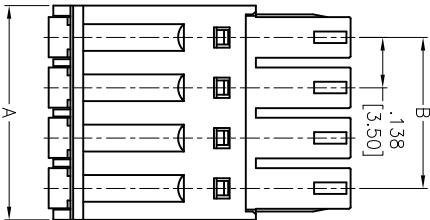

C

B

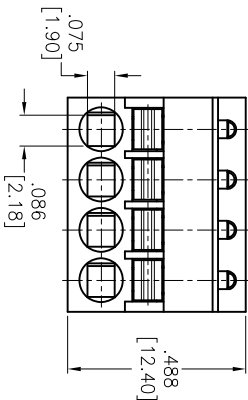

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Clamp: Phosphor Bronze, Nickel plated

Wire guard: Stainless Steel

Electrical:

Operation voltage: 300 V max

Current rating: 8 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Mechanical:

Wire range: 28-16 AWG, 1mm²

Torque: 0.4Nm(3.6Lb.in)

Wire strip length: 7-8mm

Environmental:

Lead free, RoHS compliant.

A

Poles: 02 thru 24
A = .138 [3.50] X No. of Positions + .035 [0.90]
B = .138 [3.50] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

EURO BLOCK, 138 [3.50] PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES							
.X ± .10	Ø.X ± .10	Ø.XX ± .015	Ø.XXX ± .010	APPROVALS	DATE	SIZE	REV.
CHECKED	AY	8/21/14	8/21/14	DRAWN	AY	8/21/14	REV.
APPROVED	MW	8/21/14	8/21/14	CHECKED	MW	8/21/14	REV.
REF:	S00067C	SCALE: NTS	SHEET 1 OF 1	REF:	S00067C	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1