

6

5

4

3


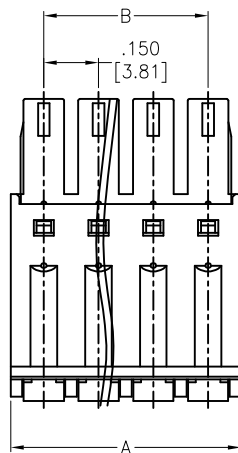
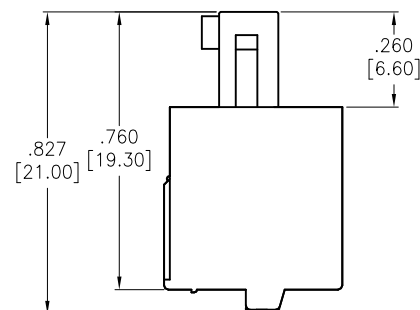

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/11/15	
A		UPDATE DRAWING	1/19/22	LH/NL

**SPECIFICATIONS:****Material:**

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contact: Copper Alloy, Nickel plated

Electrical:

Voltage rating: 300 V

Current rating: 8 A

Dielectric withstanding voltage: 1,600V for 1 minute

Mechanical:

Wire range: 28-16 AWG

Wire strip length: 7-8 mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Poles: 02 thru 24

A = .150 [3.81] X No. of Spaces + .181 [4.60]

B = .150 [3.81] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES
.X	± .10	Ø.X ± .10
.XX	± .020	Ø.XX ± .015
.XXX	± .015	Ø.XXX ± .010

DRAWN	AY	2/26/20
CHECKED	KL	2/26/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH**ADAM
TECH**909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE EURO BLOCK, .150 [3.81] PITCH			
SIZE X	PART NO. EB2A-XX-M-B	REV. A	
REF: S00067C	SCALE: NTS	SHEET 1 OF 1	