


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/26/20	

APPROVED: _____

DATE: _____ TITLE: _____

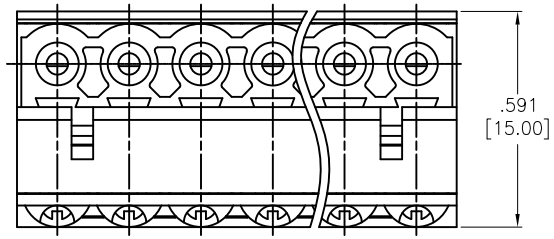

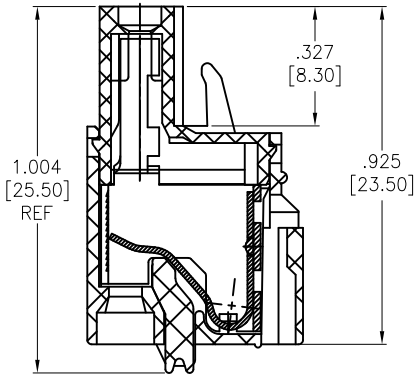

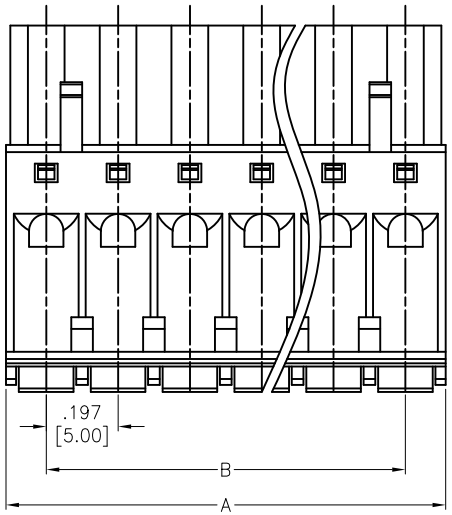

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Green
Contact: Copper Alloy, Tin Plated
Electrical:
Voltage rating: 300 V
Current rating: 10 A
Withstanding Voltage: 1,600 VAC for 1 minute
Mechanical:
Wire range: 28-12AWG
Strip length: 7-8mm
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 02 thru 24
A = .197 [5.00] x No. of Spaces + .220 [5.60]
B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LH	9/26/20
CHECKED	OC	9/26/20
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: EURO BLOCK, .197 [5.00] PITCH, CONTACT ON DOWN SIDE

SIZE	PART NO.	REV.
X	EB2A-XX-M-C-CSD	-

REF:	SCALE:	SHEET
S00067C	NTS	1 OF 1