


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/17/14	
A		UPDATE DRAWING	11/7/22	LH/NL

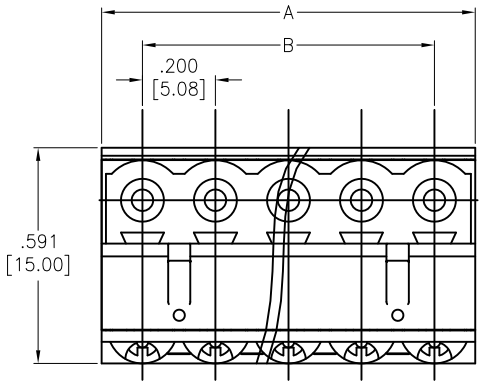

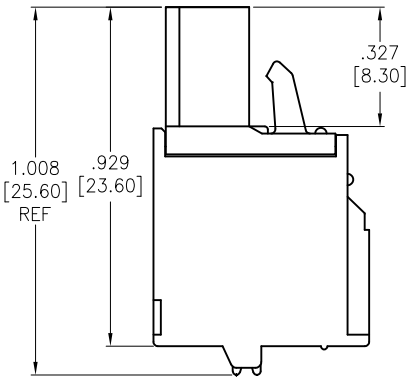

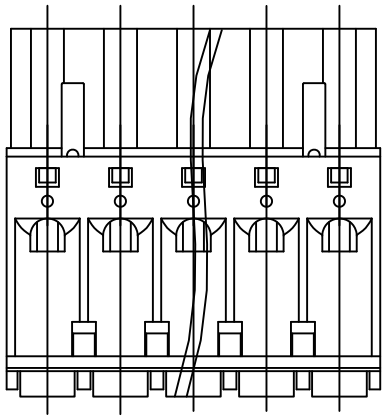

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Green
Contact: Copper Alloy, Tin plated.
Electrical:
Voltage rating: 300 VAC
Current rating: 10 Amps
Withstanding Voltage: 1600 V for 1 minute
Mechanical:
Stranded range: 28-12 AWG
Strip length: 7-8mm
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Poles: 2 thru 24
A = .200 [5.08] X No. of Positions + .024 [0.60]
B = .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	HR	11/17/14
CHECKED	SC	11/17/14
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: EURO BLOCK, .200 [5.08] PITCH
CONTACT ON DOWN SIDE

SIZE	PART NO.	REV.
X	EB2A-XX-M-D-CSD	-

REF: S00067C | SCALE: NTS | SHEET 1 OF 1