


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/24/21	
A		UPDATE DIM.	5/4/21	LH

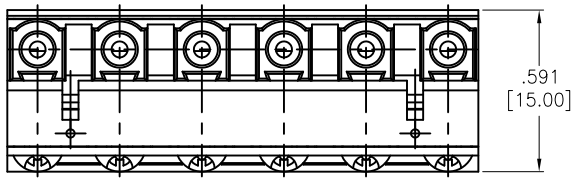

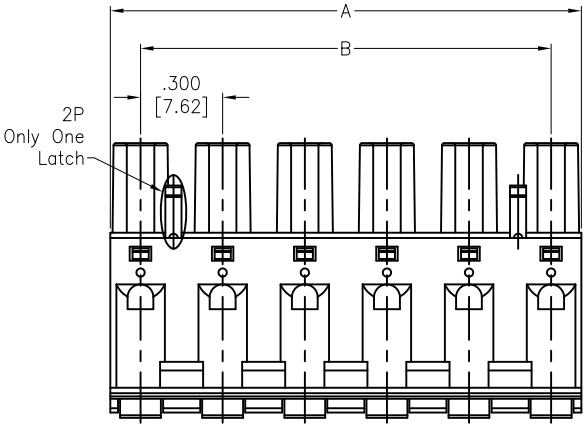

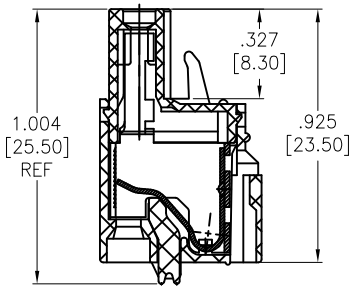

SPECIFICATIONS:

Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Green
Contact: Copper Alloy, Tin Plated

Electrical:
Voltage rating: 300 V
Current rating: 10 A
Withstanding Voltage: 1,600 VAC for 1 minute

Mechanical:
Wire range: 28-12AWG
Strip length: 7-8mm

Temperature Rating:
Operating temperature: -40°C to +105°C

Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

⚠ Positions: 02 thru 24
A = .300 [7.62] x No. of Spaces + .220 [5.60]
B = .300 [7.62] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	ØX	±.10
.XX	± .020	ØXX	±.015
.XXX	± .015	ØXXX	±.010

DRAWN	LH	3/24/21
CHECKED	LW	3/24/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: EURO BLOCK, .300 [7.62] PITCH, CONTACT ON DOWN SIDE

SIZE	PART NO.	REV.
X	EB2A-XX-M-G-CSD	A

REF: S00067C | SCALE: NTS | SHEET 1 OF 1