

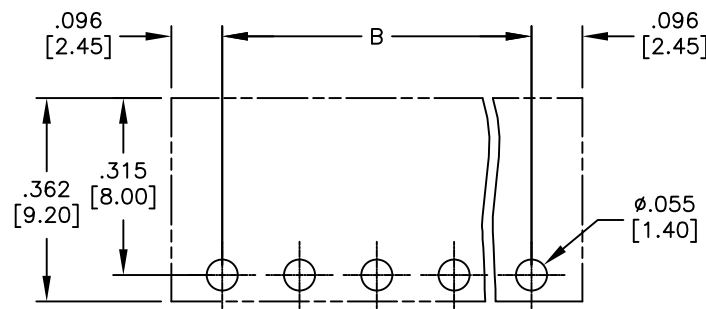
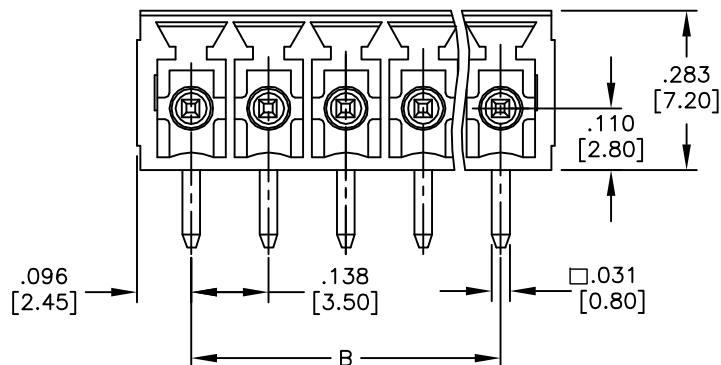


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/06/10	
A		ADD SPEC.	9/26/11	
B		UPDATE DIM.	8/22/19	AY/TY

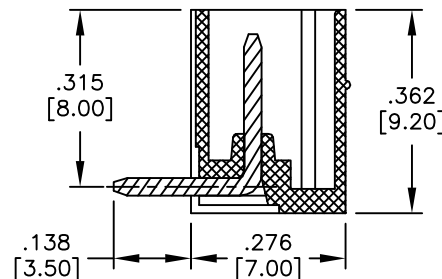

RECOMMENDED PCB LAYOUT

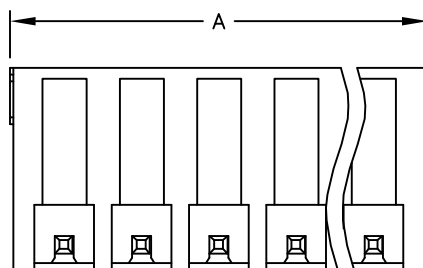

	Tolerance
2-6P	±.006 [0.15]
7-12P	±.008 [0.20]
13-18P	±.010 [0.25]
19-24P	±.012 [0.30]

SPECIFICATIONS:

Material:
 Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Contact: Copper, Tin plated
 Electrical:
 Voltage rating: 300 V
 Current rating: 10 Amp
 Withstanding voltage: 1.6KV
 Environmental:
 Operating temperature: -40°C to +115°C
 Environmental:
 Lead free, RoHS compliant.



Poles: 2 thru 24
 A = .138 [3.50] X No. of Spaces + .193 [4.90]
 B = .138 [3.50] X No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES		HOLES		INTERCONNECTS	
.X ±.10	Ø.X ±.10	TITLE		.138 [3.50] TERMINAL BLOCK	
.XX ±.020	Ø.XX ±.015	APPROVALS		DATE	
.XXX ±.015	Ø.XXX ±.010	DRAWN		DY	
APPROVED		SIZE		PART NO.	
		X		EB3-XX-A	
		REV.		B	
		REF:		S00007T	
		SCALE:		NTS	
		SHEET		1 OF 1	