

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/26/10	


APPROVED: _____


DATE: _____ TITLE: _____

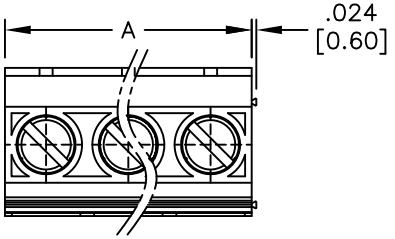

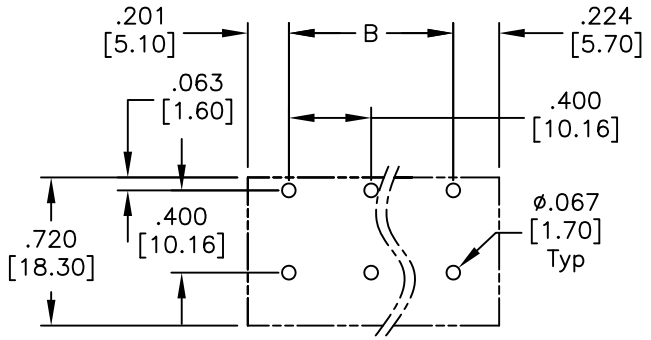

RECOMMENDED PCB LAYOUT

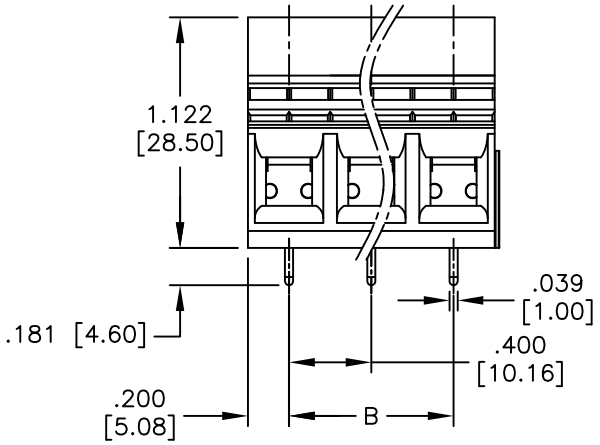

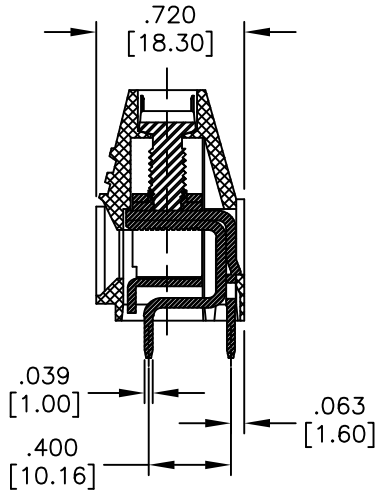

Positions: 02 thru 12
A = .400 [10.16] x No. of Positions
B = .400 [10.16] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, rated UL 94V-0
Insulator color: Green
Contact: Copper, Tin plated.
Electrical:
Operation voltage: 300 VAC
Current rating: 65 Amps
Dielectric withstanding voltage: 1600 VAC for 1 minute
Environmental:
Operating temperature: -40°C to +115°C
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	5/26/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, .400 [10.16] PITCH, SINGLE CONTACT

SIZE	PART NO.	REV.
X	EB32-XX-J-ST	-

REF: S00007T | SCALE: NTS | SHEET 1 OF 1