

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/13/22	


APPROVED: _____


DATE: _____ TITLE: _____

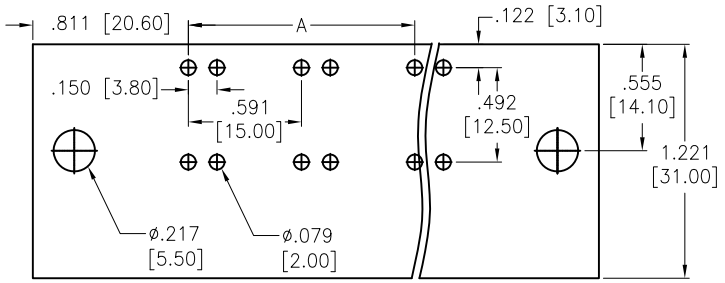

RECOMMENDED PCB LAYOUT

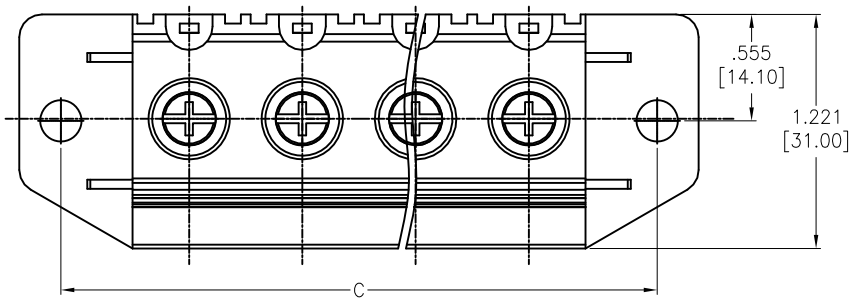

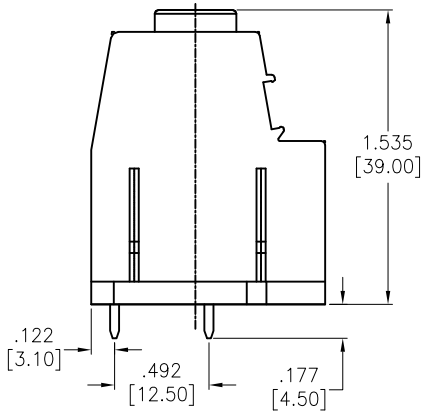

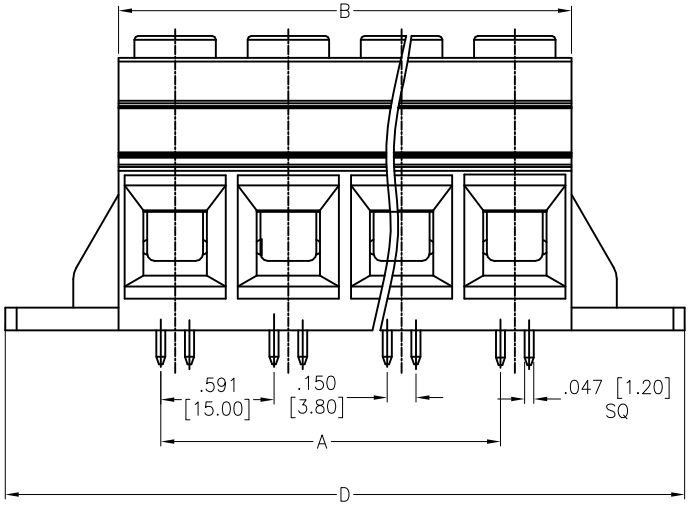

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Green
Contact: Copper Alloy, Tin plated
Screw: M5.0
Electrical:
Voltage rated: 600V
Current rated: 115A
Withstanding voltage: 2200V AC/1 Min
Mechanical:
Solid wire: 20-2AWG
Torque (Lb-In): 2.0Nm
Strip length: 17-18mm
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

Positions: 02 thru 10
A= .591 [15.00] x No. of Space
B= .591 [15.00] x No. of Positions per Row
C= .591 [15.00] x No. of Positions per Row + .748 [19.00]
D= .591 [15.00] x No. of Positions per Row + 1.181 [30.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	ØX	±.10
.XX	± .020	ØXX	±.015
.XXX	± .015	ØXXX	±.010

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

DRAWN	JJ	12/13/22
CHECKED	LW	12/13/22
APPROVED		

TITLE: EURO BLOCK, .591 [15.00] PITCH

SIZE	PART NO.	REV.
X	EB33A-XX-K-E	-

REF: S00067C | SCALE: NTS | SHEET 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH