

APPROVED: _____


DATE: _____ TITLE: _____


| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 5/7/15 | |
| A | | REVISED DIM. | 6/23/15 | AY/OC |

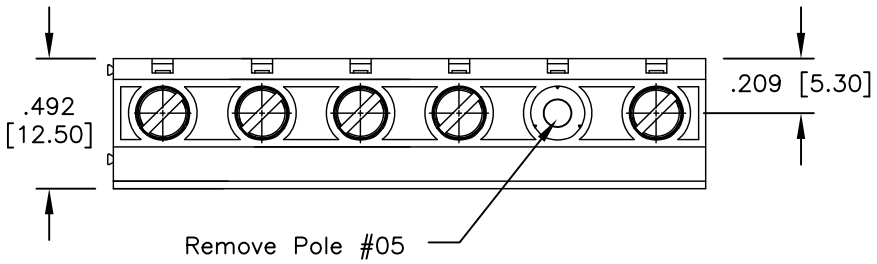


RECOMMENDED PCB LAYOUT

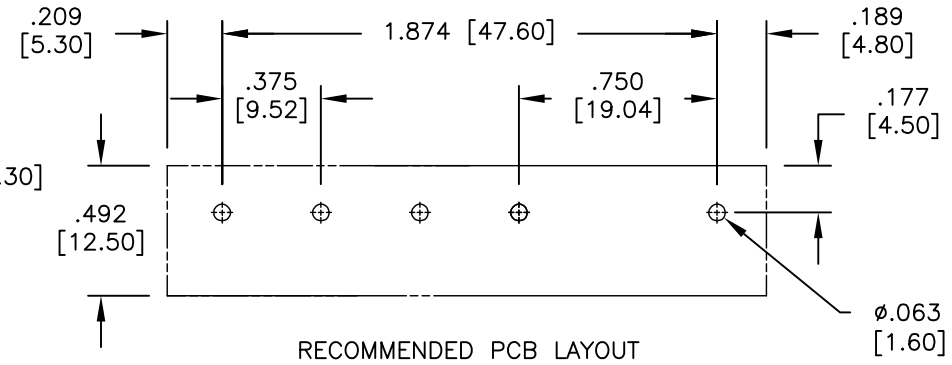

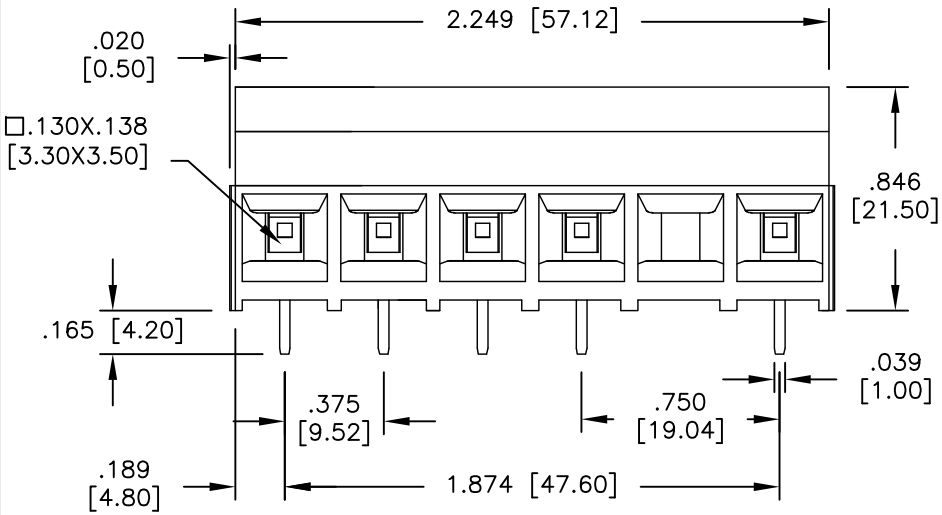
**SPECIFICATIONS:**

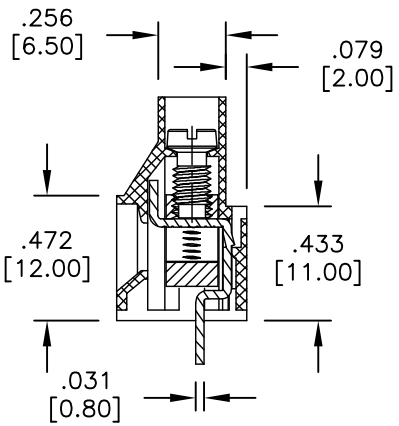Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Green
Clamp: Brass, Nickel plated
Screw: M3.5, Steel, Zn plated.
Contact: Copper Alloy, Tin plated.
Electrical:
Operation voltage: 300 VAC
Current rating: 30 Amps
Mechanical:
Wire strip length: 6–7mm
Torque (Lb–In): 6.9
Wire Range: 10–24 AWG
Withstanding Voltage: 1.6KV
Temperature Rating:
Operating temperature: –40°C to +115°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | HR | 5/7/15 |
| CHECKED | OC | 5/7/15 |
| APPROVED | | |


**ADAM TECH**
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710


TITLE: TERMINAL BLOCK, PCB, VERTICAL, 9.52MM PITCH

| SIZE | PART NO. | REV. |
|---|---|---|
| X | EB4-06-N-X05 | A |

| REF: | SCALE: | SHEET |
|---|---|---|
| S00007T | NTS | 1 OF 1 |