



APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	9427	RELEASED	3/20/09	
A		REDRAWN	8/3/12	

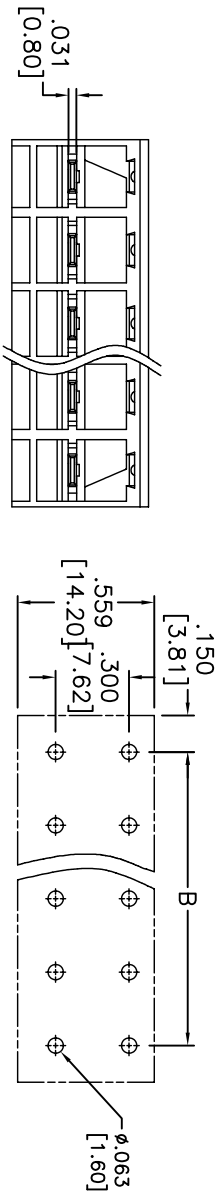

RECOMMENDED PCB LAYOUT

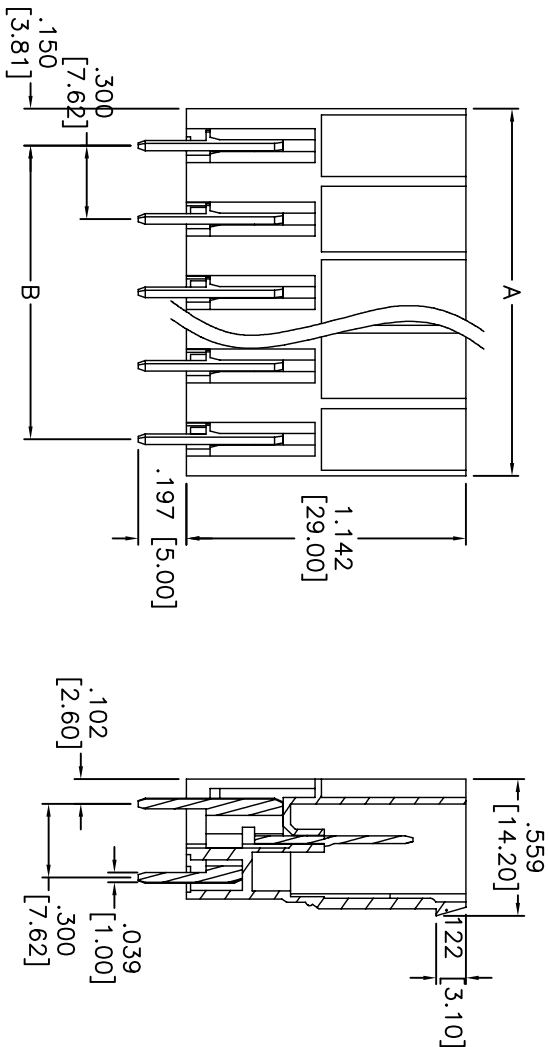

SPECIFICATIONS:

Material:
Insulator: Thermoplastic, rated UL 94V-0
Insulator color: Green
Contact: Copper, Tin plated
Electrical:
Operation voltage: 300 VAC
Current rating: 32 Amps
Withstanding Voltage: 1.6KV
Temperature Rating:
Operating temperature: -40°C to +115°C
Environmental:
Lead free, RoHS compliant.



Positions: .02 thru 16
A= .300 [7.62] x No. of Positions Per row
B= .300 [7.62] x No. of Spaces

	Tolerance
2-P	±.008 [0.20]
6-10P	±.010 [0.25]
11-16P	±.012 [0.30]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM TOLERANCES: EXCEPT AS NOTED INCHES		TITLE TERMINAL BLOCK, SOCKETS FOR PLUGGABLE, STRAIGHT, 7.62MM PITCH	
.X ±.10 ØXX ±.10 .XX ±.020 ØXX ±.015 .XXX ±.015 ØXXX ±.010		909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE	
DRAWN		3/20/09	
CHECKED			
APPROVED			
SIZE		PART NO.	
X		EB43-XX-G-180	
REF:		SCALE: NTS	
S00007T		SHEET 1 OF 1	