

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/28/17	
A		UPDATED WIRE RANGE	5/10/17	SS/GD

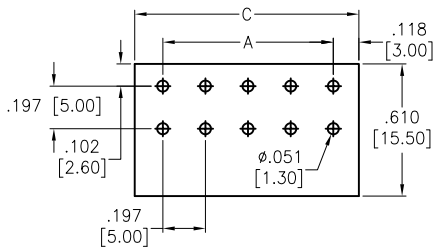


RECOMMENDED PCB LAYOUT

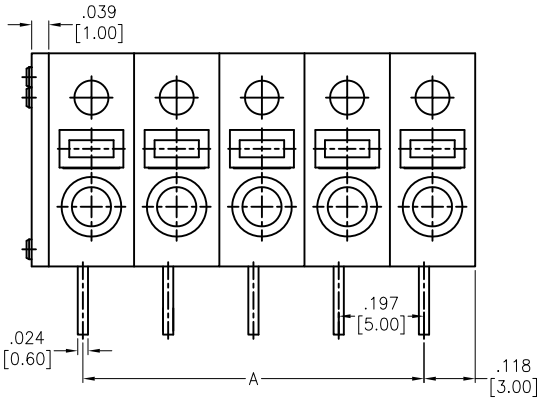

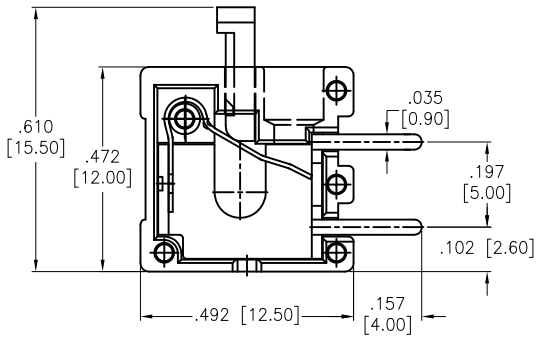

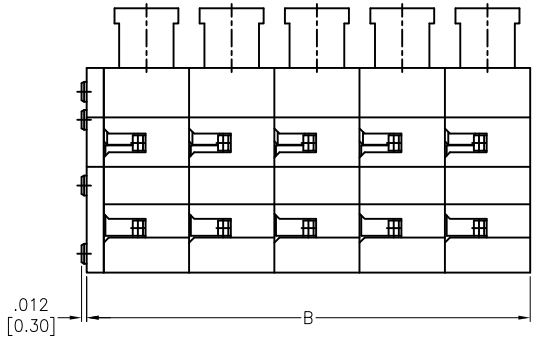

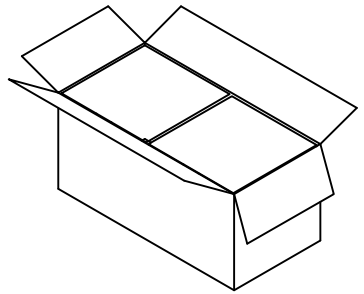

PACKAGED IN BOXES
200 pcs / Box

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Gray
Pin Header: Brass, Tin plated
Wire guard: Stainless steel
Electrical:
Operation voltage: 300 V
Current rating: 10 A
Contact resistance: 20 mohms
Insulation resistance: 500 Mohms
Dielectric withstanding voltage: 2,000 VAC for 1 minute
Mechanical:
Wire range: 26-13AWG (Minimum 2.5mm²)
Strip length: 11mm
Temperature Rating:
Operating temperature: -40°C to +105°C
Packaging: Boxes
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

Positions: 01 thru XX
A= .197 [5.00] x No. of Spaces
B= .197 [5.00] x No. of Positions + .039 [1.00]
C= .197 [5.00] x No. of Positions + .051 [1.30]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	3/28/17
CHECKED	OC	3/28/17
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
SPRING CLAMP BLOCK, PITCH .197 [5.00]

SIZE	PART NO.	REV.
X	EB46SA-XX-C-180	A

REF: S00067C | SCALE: NTS | SHEET 1 OF 1