

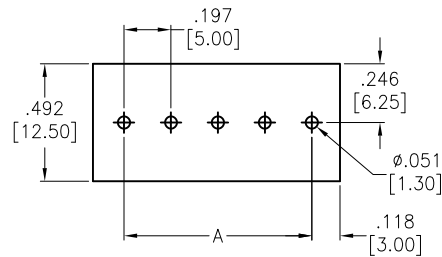
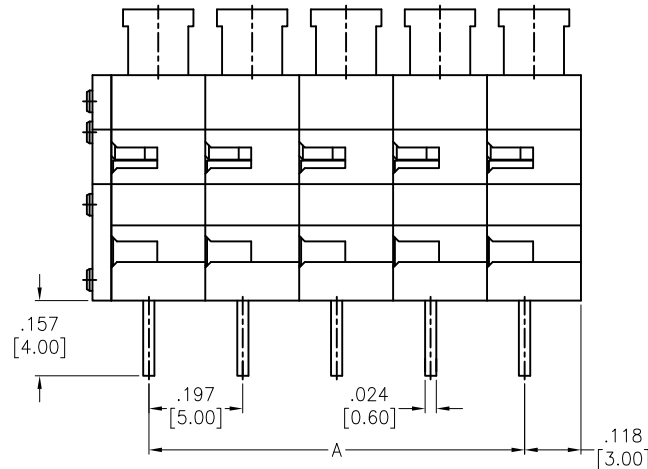


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/15/17	
A		UPDATE DRAWING	12/21/20	OW/EY

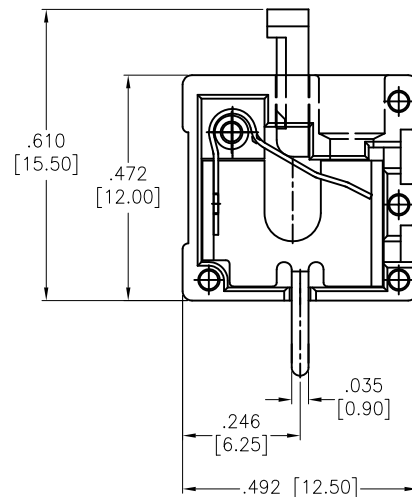

RECOMMENDED PCB LAYOUT

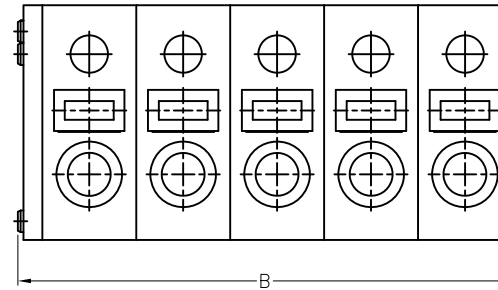

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Gray

Contacts: Copper Alloy, Tin plated

Electrical:

Voltage rating: 300 V

Current rating: 10 A

Dielectric withstanding voltage: 1600V for 1 minute

Mechanical:

Wire range: 26-16AWG

Stripping length: 11mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 01 thru 30

A = .197 [5.00] x No. of Spaces

B = .197 [5.00] x No. of Positions + .051 [1.30]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	HR	2/15/17
CHECKED	OC	2/15/17
APPROVED		

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

SPRING CLAMP BLOCK, PITCH .197 [5.00]

SIZE	PART NO.	REV.
X	EB46SA-XX-C-90	A
REF: S00067C	SCALE: NTS	SHEET 1 OF 1