

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/28/16	
A		UPDATE DRAWING	5/30/22	LH/YC


APPROVED: _____

DATE: _____ TITLE: _____

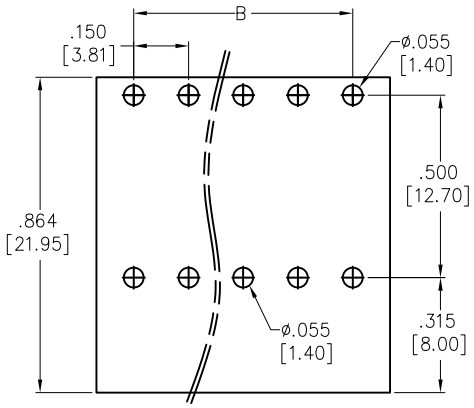

RECOMMENDED PCB LAYOUT

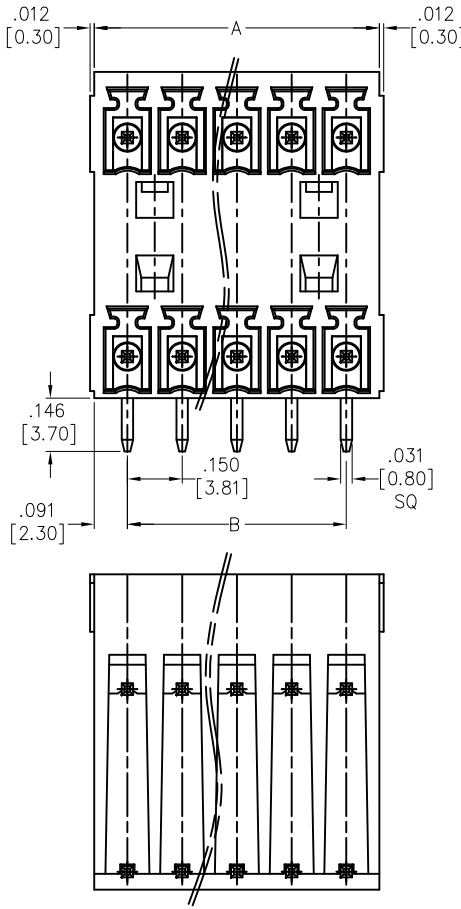

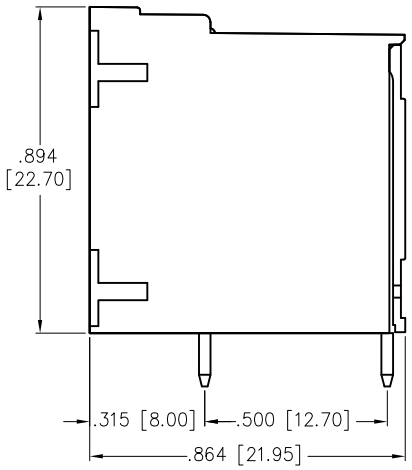

Positions: 2*02 thru 2*24
A = .150 [3.81] x No. of Spaces + .181 [4.60]
B = .150 [3.81] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Green
Contact: Copper Alloy, Tin plated
Electrical:
Operation voltage: 300 VAC
Current rating: 8 A
Dielectric withstanding voltage: 1600 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	HR	4/28/16
CHECKED	AC	4/28/16
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: TERMINAL BLOCK, .150 [3.81] PITCH, RIGHT ANGLE

SIZE	PART NO.	REV.
X	EB48A-XX-B	A

REF:	SCALE:	SHEET
S00067C	NTS	1 OF 1