

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/13/15	

APPROVED: _____


DATE: _____ TITLE: _____

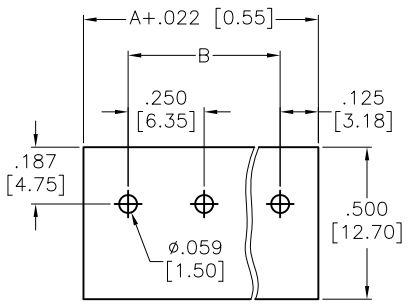


RECOMMENDED PCB LAYOUT

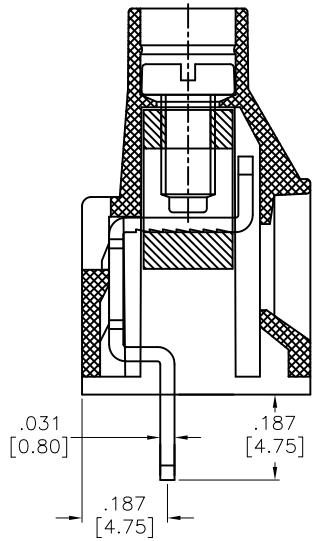

SECTION A–A

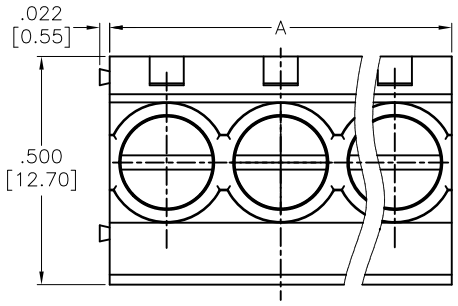

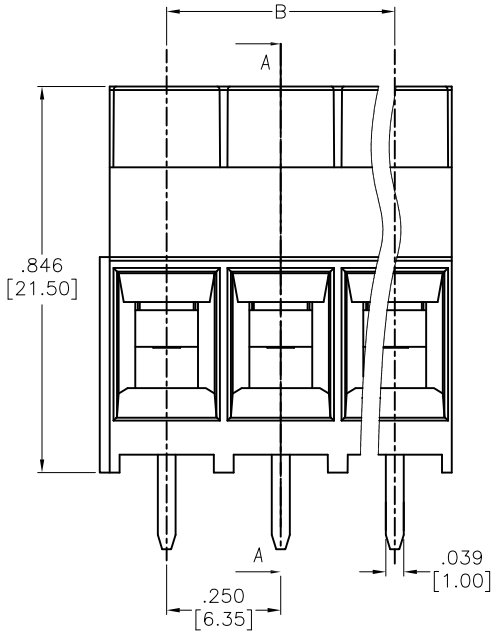

Poles: 2 thru 24

A = .250 [6.35] X No. of Positions

B = .250 [6.35] X No. of Spaces

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V–0

Insulator color: Green

Contact: Brass, Tin plated

Cage: Brass, Nickel plated

Screw: M3.0 Steel, Zinc plated

Electrical:

Operation voltage: 300 V

Current rating: 30 A

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Withstanding voltage: 2,000 VAC for 1 minute

Mechanical:

Wire Range: 10–26AWG, 4mm²

Torque: 0.5N–m, 4.43Lb–In

Strip length: 6–7mm

Temperature Rating:

Operating temperature: –40°C to +105°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	11/13/15
CHECKED	WY	11/13/15
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908–687–5000 Fax: 908–687–5710

TITLE

TERMINAL BLOCK, PCB, .250 [6.35] PITCH

SIZE	PART NO.	REV.
X	EB4A-XX-P	-

REF:	SCALE:	SHEET
S00067C	NTS	1 OF 1