


APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-	10539	RELEASED	9/14/10	
A		UPDATE SPEC.	4/11/17	AY/AC

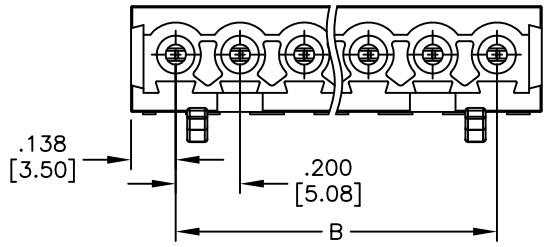



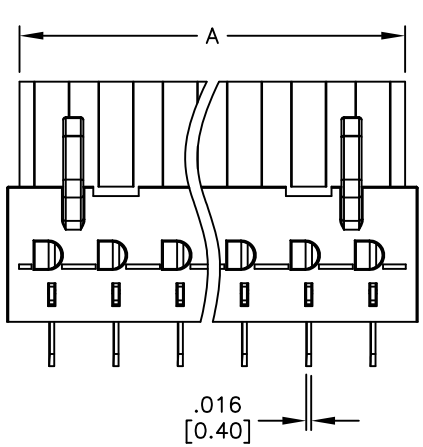

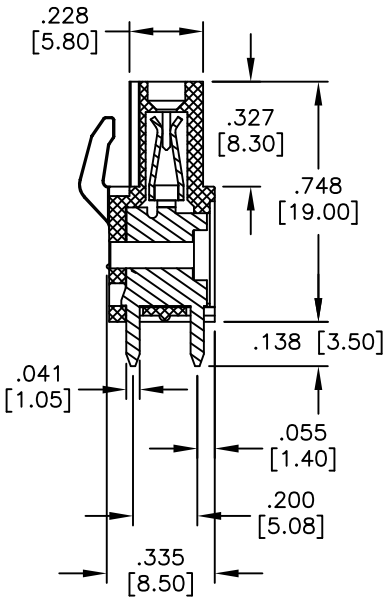

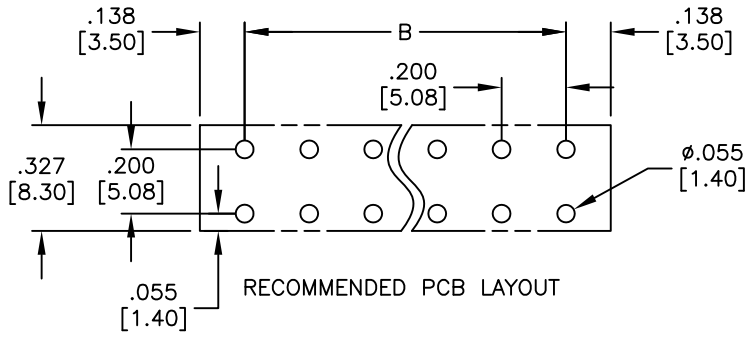

	Dim A&B
2–5P	±.006 [0.15]
6–10P	±.008 [0.20]
11–20P	±.012 [0.30]
21–24P	±.016 [0.40]

Positions: 2 thru 24
A= .200 [5.08] x No. of Poles
B= .200 [5.08] x No. of (Poles–1)

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Green
Contact: Phosphor Bronze, Tin plated
Electrical:
Voltage rating: 300 VAC
Current rating: 20 Amp
Withstanding Voltage: 1.6KV
Temperature Rating:
Operating temperature: –40°C to +115°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	9/14/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908–687–5000 Fax: 908–687–5710

TITLE
TERMINAL BLOCK, PCB, .200 [5.08] PITCH

SIZE	PART NO.	REV.
X	EB50-XX-D-180	A

REF:	SCALE:	SHEET
S00007T	NTS	1 OF 1