
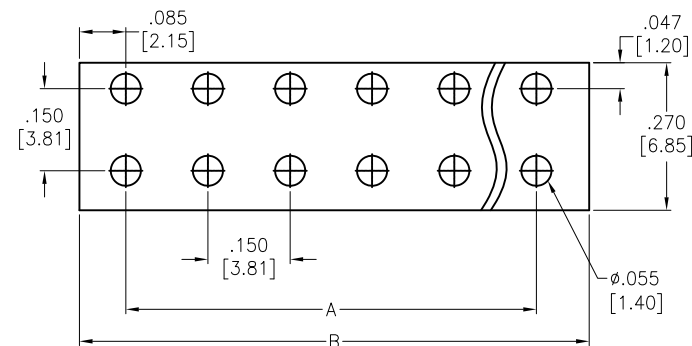
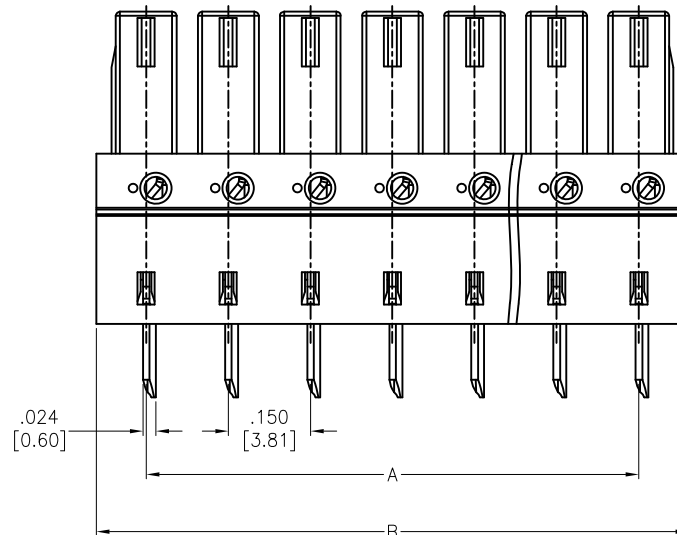
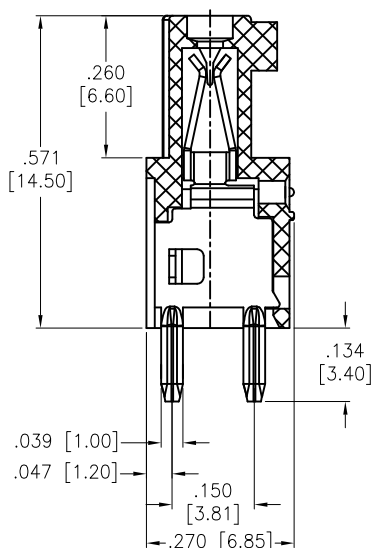


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/12/16	
A		UPDATE DRAWING	12/17/20	OW/YC

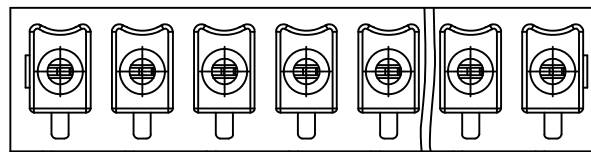

RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS:

Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Contact: Copper Alloy, Tin plated
 Electrical:
 Voltage rating: 300V
 Current rating: 8A
 Withstanding Voltage: 1600V for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



Positions: 02 thru 24
 A= .150 [3.81] x No. of (Poles-1)
 B= .150 [3.81] x No. of (Poles-1) +.181 [4.60]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ±.10 .XX ± .020 Ø.XX ±.015 .XXX ± .015 Ø.XXX ±.010		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		TITLE	
DATE		TERMINAL BLOCK, PCB, .150 [3.81] PITCH	
DRAWN	AY	1/12/16	
CHECKED	MW	1/12/16	
APPROVED			
SIZE	PART NO.	REV.	
X	EB50A-A-XX-B-180	A	
REF:	S00067C	SCALE:	NTS
		SHEET	1 OF 1