
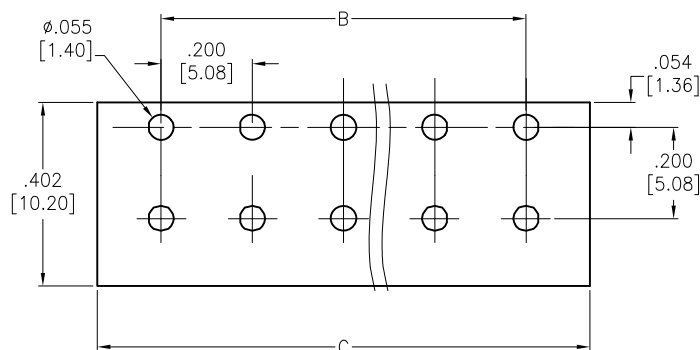




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/18/14	
A		UPDATE DRAWING	9/9/20	OW/EY

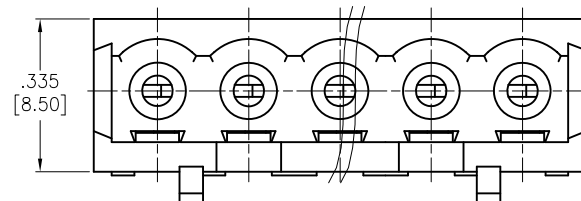

RECOMMENDED PCB LAYOUT

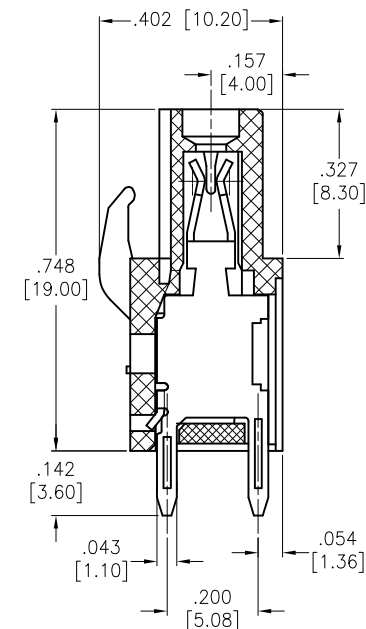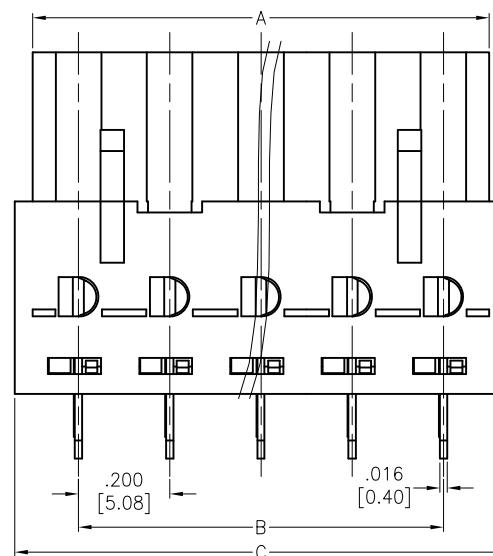

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contacts: Copper Alloy, Tin plated

Electrical:

Voltage rating: 300 V

Current rating: 15 A

Dielectric withstanding voltage: 1600V for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A= .200 [5.08] x No. of Positions

B= .200 [5.08] x No. of Space

C= .200 [5.08] x No. of Positions +.079 [2.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	4/18/14
CHECKED	SY	4/18/14
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE		
TERMINAL BLOCK, PCB, .200 [5.08] PITCH		
SIZE X	PART NO. EB50A-XX-D-180	REV. A
REF: S00067C	SCALE: NTS	SHEET 1 OF 1