

APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/26/13	
A		UPDATED DRAWING	12/10/14	HR/AC

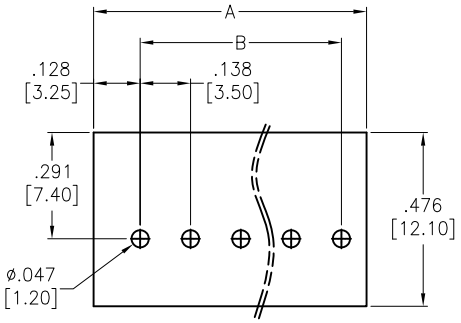

RECOMMENDED PCB LAYOUT

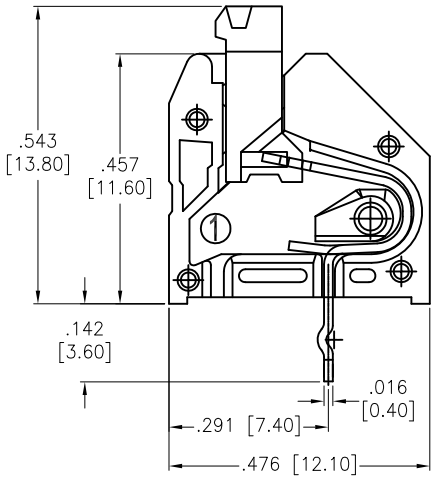

SECTION:A-A

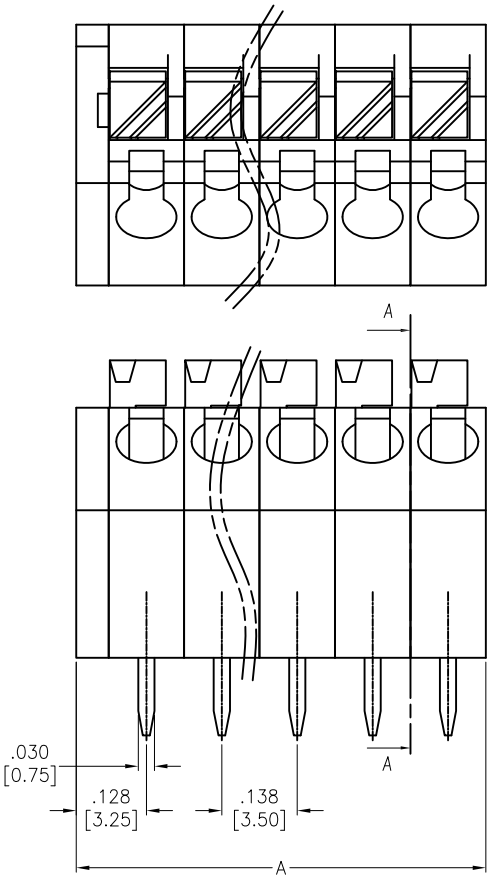

Positions: 02 thru XX

A= .138 [3.50] x No. of Positions + .059 [1.50]

B= .138 [3.50] x No. of Space

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Grey

Contact: Phosphor Bronze, Tin plated

Electrical:

Voltage rating: 300 VAC

Current rating: 5 Amps

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Mechanical:

Wire range: 22-18 AWG, 0.75mm²

Strip length: 8-9 mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	8/26/13
CHECKED	GH	8/26/13
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

.138" [3.50] PITCH, TERMINAL BLOCK

SIZE	PART NO.	REV.
X	EB59A-1-XX-A-R	A

REF: S00067C | SCALE: NTS | SHEET 1 OF 1