

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

Date

Appr

-

RELEASED


8/29/17

D

C

B

A

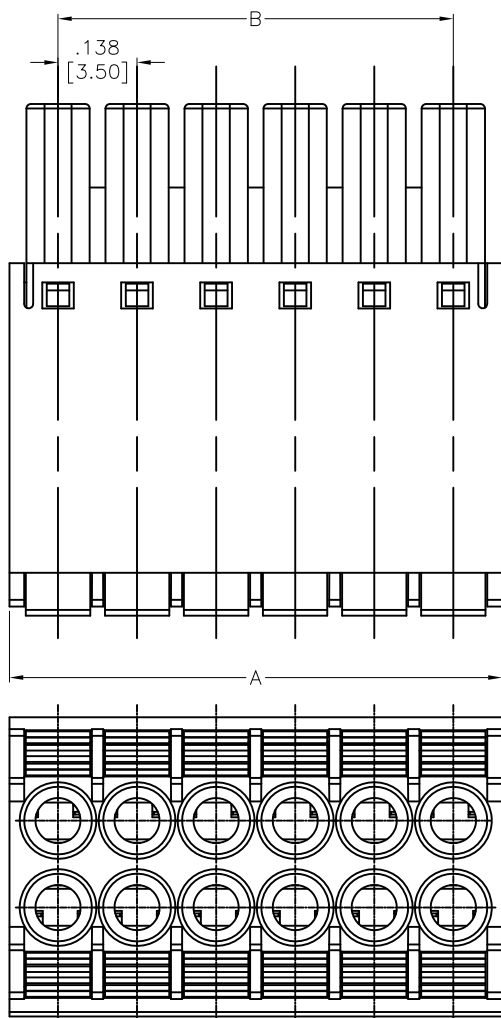

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Clamp: Copper Alloy, Tin plated

Shrapnel: Stainless steel

Electrical:

Voltage rated: 300 V

Current rated: 8 A

Contact resistance: 20 mΩ

Insulation resistance: 500 MΩ @ 500 VDC

Withstanding voltage: 2000V AC/1 Min

Mechanical:

Wire range: 24-16AWG, 1.0mm²


Steip Length: 9-10 mm

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant.

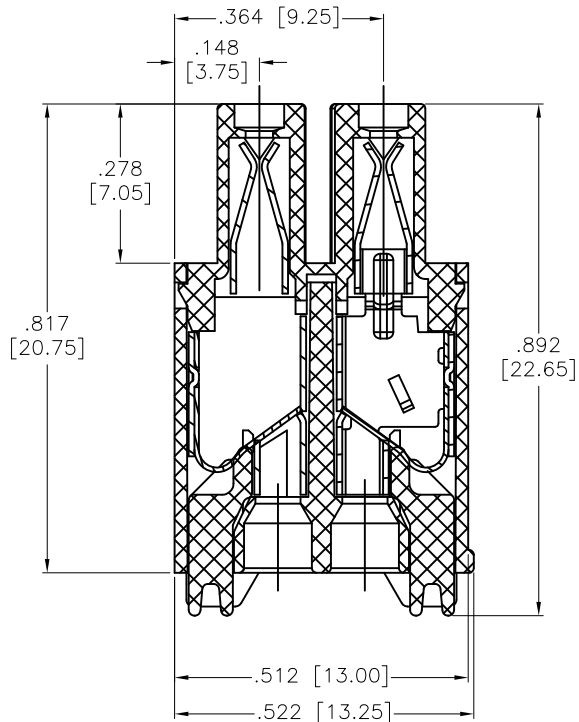

D

C

B

A

Positions: 4(2x02) thru 48(2x24)

A = .138 [3.50] x No. of Spaces + .169 [4.30]

B = .138 [3.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DATE

DRAWN

AY

8/29/17

CHECKED

RT

8/29/17

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

TERMINAL BLOCK, .138 [3.50] PITCH
DOUBLE LEVEL, BACK TO BACK

SIZE

X

PART NO.

EB90DA-XX-A-BB

REV.

-

REF: S00067C

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1