
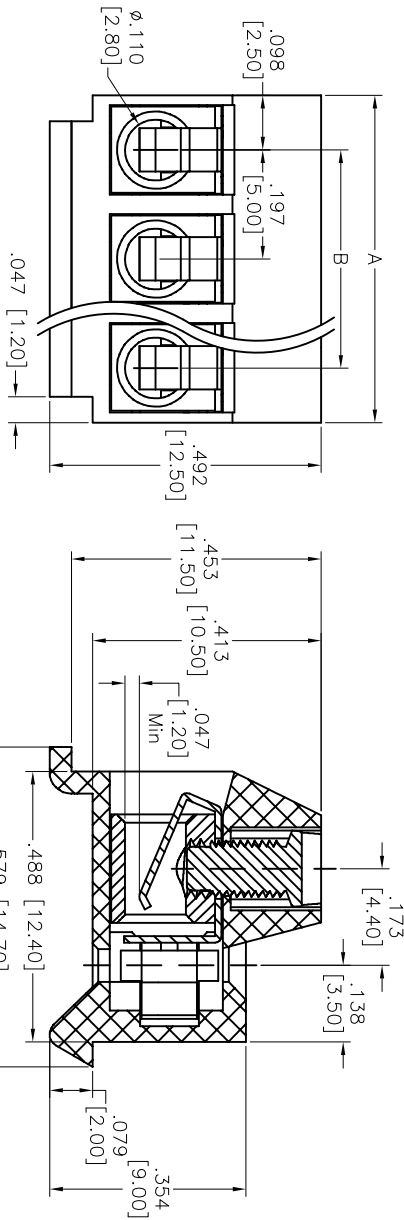


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/04/11	
A		REVISED SPEC.	04/02/12	



SPECIFICATIONS:

Material:
Insulator: Thermoplastic, rated UL 94V-0
Insulator color: Black
Contact: Brass, Nickel plated
Wire guard: Phosphor Bronze, Tin plated
Screw: Steel, M2.6-M3 /Zn Plated

Electrical:
Operation voltage: 300 VAC
Current rating: 10 Amps
Withstanding Voltage: 1.6KV

Mechanical:
Wire range (mm²): 0.2-2.5
Solid wire (AWG): 14-26
Stranded wire (AWG): 14-26
Torque(lb-in): 3.5
Wire strip length (mm): 6-7
Temperature Rating:
Operating temperature: -40°C to +115°C
Environmental:
Lead free, RoHS compliant.



Positions: 2 thru 24
A = .197 [5.00] x No. of Positions
B = .197 [5.00] x No. of Spaces

	Tolerance
2-6P	±.006 [0.15]
7-12P	±.008 [0.20]
13-18P	±.010 [0.25]
19-24P	±.012 [0.30]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH 909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
INCHES				Holes			
.X	± .10	ØXX	± .10	TITLE			
.XX	± .020	ØXXX	± .015	EURO BLOCK, .197 [5.00] PITCH			
.XXX	± .015	ØXXX	± .010	DRAWN TW 10/28/11			
APPROVALS				DATE			
DRAWN				TW			
CHECKED				AY			
APPROVED				10/28/11			
SIZE				PART NO.			
X				EB96-XX-C			
REV.				A			
REF:				SCALE: NTS			
S00007T				SHEET 1 OF 1			