
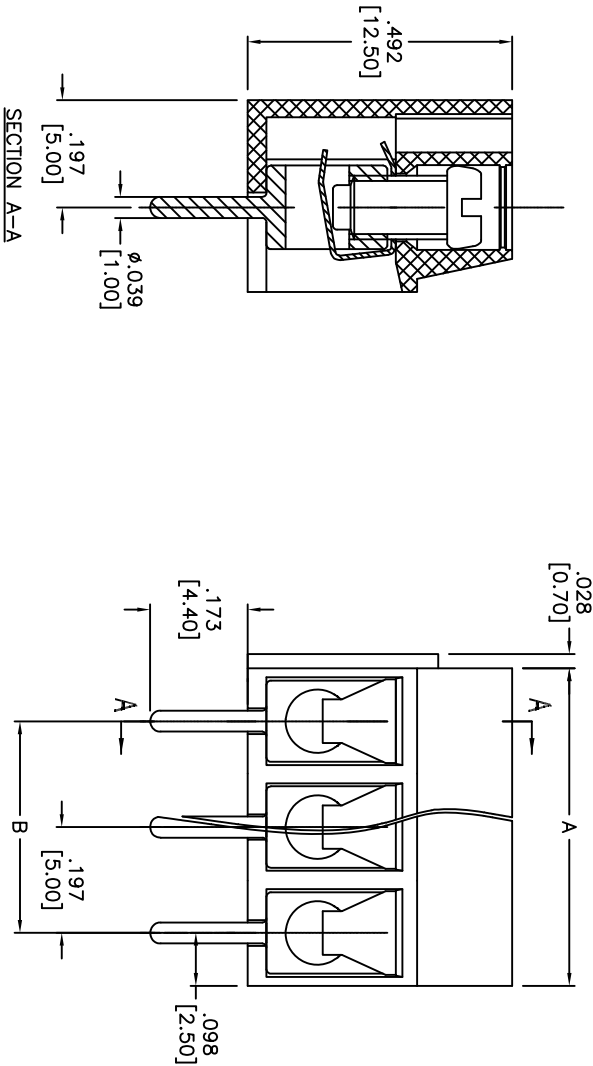
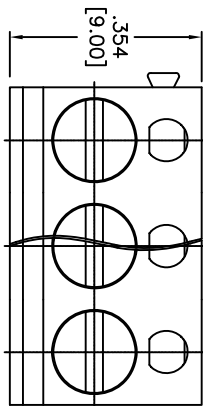


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/15/14	
A		REVISED SPEC.	8/25/14	AY/MMW

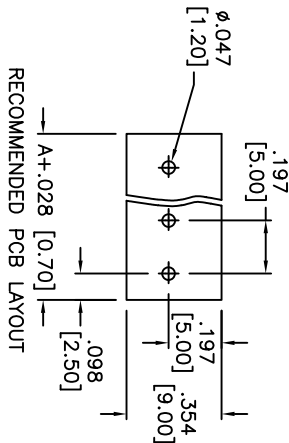

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0
Insulator color: Blue
Contact: Brass, Tin plated
Shrapnel: Phosphor Bronze, Nickel plated
Screw: M3 Steel, Zinc plated

Electrical:

Operation voltage: 250 VAC max
Current rating: 16 Amps
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min @ 500 VDC
Dielectric withstanding voltage: 2,000 VAC for 1 minute
Wire range: 22-14AWG, 1.5mm²

Mechanical:

Torque: 0.5Nm (4.5Lb.In)
Strip length: 4-4.5mm
Temperature Rating:
Operating temperature: -30°C to +120°C
Environmental:
Lead free, RoHS compliant.



Positions: 02 thru 24
A = .197 [5.00] x No. of Positions
B = .197 [5.00] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.197" [5.00] PITCH, TERMINAL BLOCK

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES	HOLES	ØX	±.10	ØXXX	±.015	ØXXX	±.010
.X	±.10	ØX	±.10	ØXXX	±.015	ØXXX	±.010
.XX	±.020	ØXX	±.015	ØXXX	±.010	ØXXX	±.010
.XXX	±.015	ØXXX	±.010	ØXXX	±.010	ØXXX	±.010
APPROVALS				DATE			
DRAWN	AY		5/15/14	SIZE	PART NO.	REV.	
CHECKED	SY		5/15/14	X	EBAA-XX-C-BU	A	
APPROVED				REF: S00067C	SCALE: NTS	SHEET 1 OF 1	