
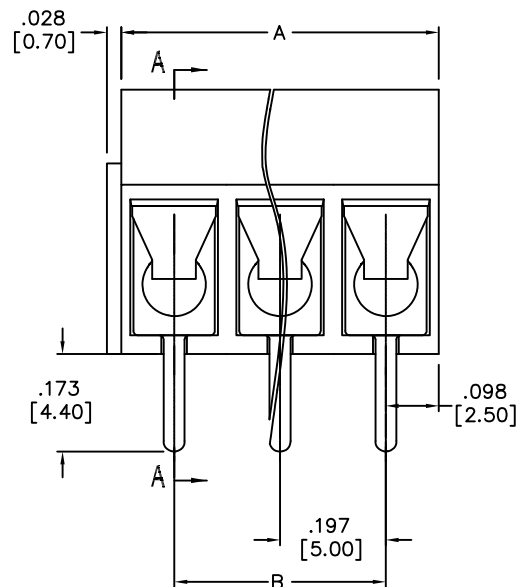
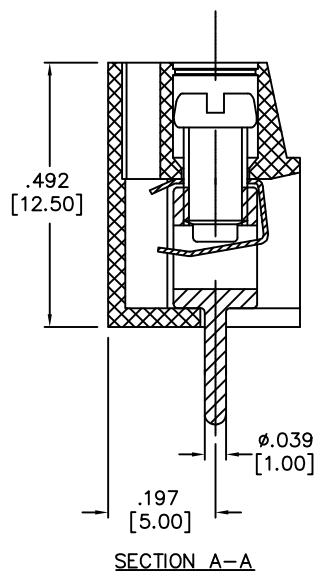
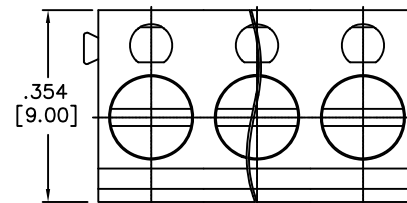


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/22/14	

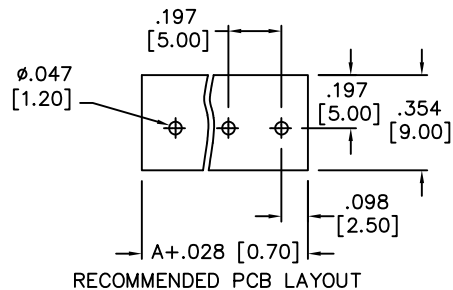

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Grey

Contact: Brass, Tin plated

Shrapnel: Phosphor Bronze, Nickel plated

Screw: M3 Steel, Zinc plated

Electrical:

Operation voltage: 250 VAC max

Current rating: 16 Amps

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Wire range: 22-14AWG, 1.5mm²

Mechanical:

Torque: 0.5Nm (4.5Lb.In)

Strip length: 4-4.5mm

Temperature Rating:

Operating temperature: -30°C to +120°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A = .197 [5.00] x No. of Positions

B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

APPROVALS		DATE
DRAWN	AY	10/22/14
CHECKED	MW	10/22/14
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.197" [5.00] PITCH, TERMINAL BLOCK

SIZE X	PART NO. EBAA-XX-C-GY	REV. -
REF: S00067C	SCALE: NTS	SHEET 1 OF 1