

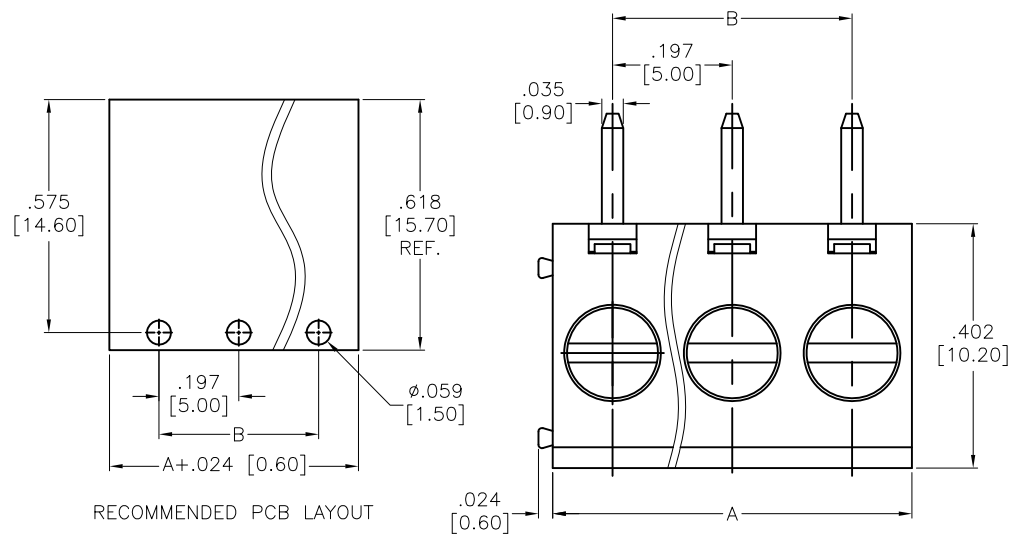


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/21/18	

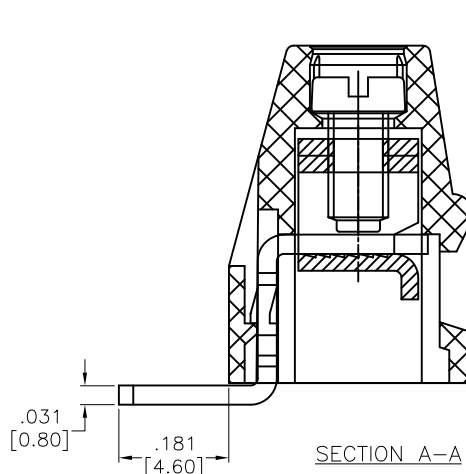

SPECIFICATIONS:
 Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Contact: Copper Alloy, Tin plated
 Screw: Steel, M2.5, Zinc plated
 Cage: Steel, Tin plated
 Electrical:
 Voltage rated: 300 V
 Current rated: 16 A
 Contact resistance: 20 mΩ
 Insulation resistance: 500 MΩ @ 500 VDC
 Withstanding voltage: 1,600 V/1 Min
 Mechanical:
 Solid wire: 22-12AWG 2.5mm²
 Torque (Lb-In): 0.4Nm (3.6lb-in)
 Strip length: 6-7mm
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.

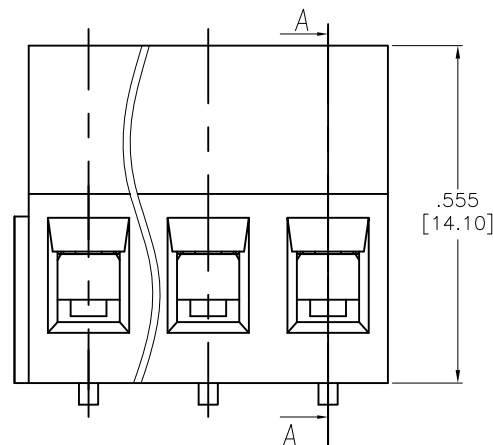

Positions: 02 thru 24
 A = .197 [5.00] x No. of Positions
 B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES				<div>ADAM TECH</div> 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 INTERCONNECTSFax: 908-687-5710		
.X	± .10	Ø.X	±.10			
.XX	± .020	Ø.XX	±.015			
.XXX	± .015	Ø.XXX	±.010			
TITILE				EURO BLOCK, .197 [5.00] PITCH, RIGHT ANGLE		
APPROVALS		DATE		SIZE	PART NO.	REV.
DRAWN	HR	12/21/18		X	EBAD-B-XX-C	-
CHECKED	LW	12/21/18		REF:	S00067C	SCALE: NTS
APPROVED				SHEET 1 OF 1		